

TO: Mail Stop 8 Director of the U.S. Patent and Trademark Office P.O. Box 1450 Alexandria, VA 22313-1450	REPORT ON THE FILING OR DETERMINATION OF AN ACTION REGARDING A PATENT OR TRADEMARK
---	---

In Compliance with 35 U.S.C. § 290 and/or 15 U.S.C. § 1116 you are hereby advised that a court action has been filed in the U.S. District Court 12/16/2009 on the following ☐ Patents or ☒ Trademarks:

DOCKET NO. 4:09-cv-939 SWW	DATE FILED 12/16/2009	U.S. DISTRICT COURT 12/16/2009
PLAINTIFF Perfect 10 Antenna Company and DS Engineering, LLC		DEFENDANT John Mezzalingua Associates, Inc. d/b/a Production Products Company a/k/a PPC
PATENT OR TRADEMARK NO.	DATE OF PATENT OR TRADEMARK	HOLDER OF PATENT OR TRADEMARK
1 2298884	11/9/1999	Perfect 10 Antenna Company
2 7118416 b2	10/10/2006	John Mezzalingua Associates Inc
3 7513795 b1	4/7/2009	DS Engineering LLC
4		
5		

In the above—entitled case, the following patent(s)/ trademark(s) have been included:

DATE INCLUDED	INCLUDED BY	<input type="checkbox"/> Amendment	<input type="checkbox"/> Answer	<input type="checkbox"/> Cross Bill	<input type="checkbox"/> Other Pleading
PATENT OR TRADEMARK NO.	DATE OF PATENT OR TRADEMARK	HOLDER OF PATENT OR TRADEMARK			
1					
2					
3					
4					
5					

In the above—entitled case, the following decision has been rendered or judgement issued:

DECISION/JUDGEMENT

CLERK JAMES W. McCORMACK	(BY) DEPUTY CLERK <i>Halle Robinson</i>	DATE <i>12/16/2009</i>
------------------------------------	--	---------------------------

Copy 1—Upon initiation of action, mail this copy to Director Copy 3—Upon termination of action, mail this copy to Director
 Copy 2—Upon filing document adding patent(s), mail this copy to Director Copy 4—Case file copy

Perfect 10 are and will continue to be confused by competing products, such as Mezzalingua/PPC's cable products that use marks incorporating the term "Perfect".

36. Mezzalingua/PPC markets a cable product under the name "Perfect Flex". Perfect 10 notified Mezzalingua/PPC on May 13, 2009, that Mezzalingua/PPC was infringing Perfect 10's PERFECT VISION trademark.

37. Mezzalingua/PPC's use of the term "Perfect Flex" infringes Perfect 10's unregistered PERFECT 10 and PERFECT 10 SATELLITE DISTRIBUTING COMPANY marks and is in violation of the Arkansas Deceptive Trade Practices Act, A.C.A. § 4-88-101 *et. seq.*

38. Perfect 10 will be irreparably harmed by Defendant's use of the term "Perfect Flex" on Defendant's cable products.

39. Defendant Mezzalingua/PPC was aware of Perfect 10's marketing success. With knowledge of Perfect 10 and its unregistered trademarks, Mezzalingua/PPC attempted to illegally appropriate Perfect 10's customers by using a confusingly similar name on its cable products.

40. Perfect 10 is entitled to a temporary restraining order, preliminary injunction, and permanent injunction prohibiting Mezzalingua/PPC from using the confusingly similar name "Perfect Flex" on Mezzalingua/PPC's cable products.

41. Perfect 10 is entitled to compensatory damages from Defendant. Mezzalingua/PPC for infringement of its PERFECT 10 and PERFECT 10 SATELLITE DISTRUBTING COMPANY marks.

42. Perfect 10 is entitled to statutory and punitive damages from Defendant Mezzalingua/PPC for willful infringement of its PERFECT 10 and PERFECT 10 SATELLITE DISTRIBUTING COMPANY marks.

COUNT IV.
DECLARATORY JUDGMENT OF NONINFRINGEMENT
OF THE '416 PATENT

43. As set forth hereinabove, on May 13, 2009, and December 10, 2009, Mezzalingua/PPC threatened Bob Chastain, CEO of Perfect 10, with an infringement lawsuit related to Perfect 10's sale of connectors. Accordingly, an actual and continuing controversy has arisen and continues to exist between Perfect 10 and Mezzalingua/PPC about Perfect 10's noninfringement of any of Mezzalingua/PPC's patents related to co-axial cable connectors, including specifically the '416 Patent.

44. Perfect 10 has not infringed, and is not now infringing, contributorily infringing or inducing infringement of the '416 Patent or any other patents, either literally or under the doctrine of equivalents.

45. Accordingly, Perfect 10 requests a declaration from this Court that Perfect 10 has not infringed, and is not now infringing, contributorily infringing or inducing infringement of the '416 Patent or any other patents of Mezzalingua/PPC, either literally or under the doctrine of equivalents.

COUNT V.
DECLARATORY JUDGMENT OF INVALIDITY OF THE '416 PATENT

46. As described hereinabove, on May 13, 2009, Mezzalingua/PPC contacted Perfect 10 and accused Perfect 10 of infringing its cable connector-related patents, including specifically the '416 Patent. Accordingly, an actual and continuing controversy

has arisen and continues to exist between Perfect 10 and Mezzalingua/PPC about the validity of each of the claims of the '416 Patent.

47. Upon information and belief, the '416 Patent, with each of the claims thereof, are invalid and void for failure to meet conditions of patentability set forth in the provisions of the patent laws, 35 U.S.C. § 100 *et seq.*, including but not limited to one or more of 35 U.S.C. §§ 101, 102, 103, and 112.

COUNT VI.
DECLARTORY JUDGMENT OF UNENFORCABILITY DUE TO
ESTOPPEL, LACHES, WAIVER, AND/OR UNCLEAN HANDS

48. Upon information and belief, Mezzalingua/PPC is barred in whole or in part from asserting the '416 Patent against Perfect 10 by estoppel, laches, waiver, unclean hands, prosecution laches, prosecution history estoppel and/or other applicable equitable doctrines or defenses.

DEMAND FOR JURY TRIAL

49. Plaintiff requests a jury trial under Federal Rules of Civil Procedure Rule 38 on all issues so triable.

PRAYER FOR RELIEF

50. **WHEREFORE**, the Plaintiffs pray for the following relief against Defendant Mezzalingua/PPC:

- A. For a declaratory judgment by the Court, finding and declaring that P-10/DS have not infringed, and are not now infringing, contributorily infringing or inducing infringement of the '416 Patent and/or other patents of Mezzalingua/PPC, either literally or under the doctrine of equivalents;
- B. For a declaratory judgment by the Court, finding and declaring each of the claims of the '416 Patent is invalid for failure to comply with

the provision of the patent laws, 35 U.S.C. 100 *et. seq.*, including but not limited to, one or more of 35 U.S.C. §§ 101, 102, 103, and 112;

- C. For a declaratory judgment by the Court, finding and declaring the '416 Patent is invalid and not infringed by P-10/DS, and that DS's patent is valid;
- D. For fees and costs as may be proper under 35 U.S.C. § 100 *et. seq.*;
- E. For an injunction for trademark infringement of Perfect 10's trademarks PERFECT 10, PERFECT 10 SATELLITE DISTRIBUTING COMPANY and PERFECT VISION;
- F. For compensatory damages for trademark infringement of Perfect 10's trademarks PERFECT 10, PERFECT 10 SATELLITE DISTRIBUTING COMPANY and PERFECT VISION;
- G. For statutory and punitive damages for willful violation of Perfect 10's trademarks PERFECT 10, PERFECT 10 SATELLITE DISTRIBUTING COMPANY and PERFECT VISION;
- H. For reasonable attorneys' fees and costs for defense of, and for trademark infringement of Perfect 10's trademarks PERFECT 10, PERFECT 10 SATELLITE DISTRIBUTING COMPANY and PERFECT VISION;
- I. For prejudgment interest on all monetary awards as permitted by law; and,

J. For such other and further relief as the Court deems just and proper.

DATED: 12-16-09

Respectfully submitted,



Charles Darwin "Skip" Davidson
AR Bar No. 73026

Davidson Law Firm, Ltd.
724 Garland, Cantrell at State
P.O. Box 1300
Little Rock, AR 72201
Telephone: (501) 374-9977
Facsimile: (501) 374-5917
E-mail: skipd@dlf-ar.com



US007118416B2

(12) **United States Patent**
Montana et al.

(10) Patent No.: **US 7,118,416 B2**
(45) Date of Patent: **Oct. 10, 2006**

(54) **CABLE CONNECTOR WITH ELASTOMERIC BAND**

(75) Inventors: **Noah Montana, Syracuse, NY (US);**
Michael T. Fox, Syracuse, NY (US)

(73) Assignee: **John Mezzalingua Associates, Inc.,**
East Syracuse, NY (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/781,376**

(22) Filed: **Feb. 18, 2004**

(65) **Prior Publication Data**
US 2005/0181652 A1 Aug. 18, 2005

(51) Int. Cl.
H01R 9/05 (2006.01)

(52) U.S. Cl. **439/584**

(58) **Field of Classification Search** **439/578,**
439/584, 583, 274, 275, 287, 582
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,258,737 A 10/1941 Browne
2,651,529 A 9/1953 Wayman
3,184,706 A 5/1965 Atkins
3,219,367 A 11/1965 Franck
3,307,138 A 2/1967 Swartz
3,406,373 A 10/1968 Forney, Jr.
3,498,647 A 3/1970 Schroder
3,621,413 A 11/1971 Hilbert
3,629,792 A 12/1971 Dorrell
3,671,922 A 6/1972 Zerlin et al.
3,678,446 A 7/1972 Siebelist 439/583
3,846,738 A 11/1974 Neponim
3,915,539 A 10/1975 Collins
3,985,418 A 10/1976 Spinner
4,046,451 A 9/1977 Jude et al.

4,126,372 A 11/1978 Hashimoto et al.
4,150,250 A 4/1979 Lundberg
4,156,554 A 5/1979 Anjla
4,280,749 A 7/1981 Hermer
4,346,958 A 8/1982 Blanchard
4,373,767 A 2/1983 Cairns
4,408,821 A 10/1983 Forney, Jr.
4,444,453 A 4/1984 Kirby et al. 439/583
4,525,000 A 6/1985 Backle
4,575,274 A 3/1986 Hayward
4,583,811 A 4/1986 McMills
4,600,263 A 7/1986 DeChamp et al.
4,614,390 A 9/1986 Baker
4,645,281 A 2/1987 Burger
4,650,228 A 3/1987 McMills et al.
4,655,159 A 4/1987 McMills

(Continued)

FOREIGN PATENT DOCUMENTS

DE 1 191 880 4/1954

(Continued)


Primary Examiner—Phuong Dinh

(74) Attorney, Agent, or Firm—Wall Marjama & Bilinski LLP

(57) **ABSTRACT**

A connector for a coaxial cable includes a connector body and a fastening member for connecting said connector to an object such as an equipment port. A post is fitted at least partially inside the connector body for receiving a prepared end of the cable. A compression member is fitted to a back of the connector body. An elastomeric band is fitted inside a cavity formed at least in part by the compression member. Axial movement of the compression member onto said connector body causes the elastomeric band to seal an outer layer of the cable to the connector to isolate the inside of the connector from environmental influences.

21 Claims, 7 Drawing Sheets

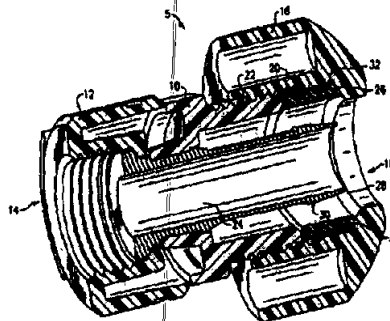

United States Patent [19]

Sucht et al.

[11] Patent Number: 4,952,174

[45] Date of Patent: Aug. 28, 1990

[54] COAXIAL CABLE CONNECTOR

[75] Inventors: Gayle A. Sucht, Mountain View;
John S. Mattis, Sunnyvale, both of
Calif.[73] Assignee: Raychem Corporation, Menlo Park,
Calif.

[21] Appl. No.: 485,798

[22] Filed: Feb. 22, 1990

Related U.S. Application Data

[63] Continuation of Ser. No. 351,738, May 15, 1989, abandoned.

[31] Int. Cl.⁵ H01R 13/36

[52] U.S. Cl. 439/584

[58] Field of Search 439/578-585

References Cited

U.S. PATENT DOCUMENTS

2,449,983	9/1948	Devol	174/88
3,206,540	9/1965	Cohen	174/89
3,209,287	9/1965	Owner et al.	333/34
3,847,463	11/1974	Hayward et al.	339/4,177
4,346,958	8/1982	Blanchard	339/177 R
4,400,050	8/1983	Hayward	339/177 R
4,575,274	3/1986	Hayward	403/2
4,583,811	4/1986	McMilla	339/177 R
4,696,332	9/1987	Mattis	439/863
4,854,893	8/1989	Morris	439/878

OTHER PUBLICATIONS

Product Data Sheet for Quantum Reach Coaxial Cable.


Product Data Sheet for Parameter III Coaxial Cable.


Primary Examiner—Joseph H. McGlynn
Attorney, Agent, or Firm—A. Stephen Zavell; Herbert
G. Burkard

[57] ABSTRACT

A coaxial cable connector is provided for installation and use with a prepared end of a coaxial cable. The connector comprises a body and a nut threadably tightenable to the body. The body includes a center pin chuck for engaging the center conductor of the cable when the nut assembly is tightened to the body. The nut defines an interior space including a mandrel assembly which is freely rotatable within the interior space until the nut is tightened to the body. The mandrel assembly includes an insulator cone for guiding the center conductor; it includes a clamping arrangement for engaging and clamping the center pin chuck as the nut is tightened to the body. The assembly further includes a mandrel which is slidably mounted under the cable outer metal jacket in a space provided after removal of a portion of the dielectric core incident to preparation of the cable end. A ferrule is slidably mounted over the outer jacket and the ferrule includes collet fingers disposed over a portion of the mandrel. The mandrel includes a ferrule collet closure for closing the collet fingers of the ferrule to cause them to compress the outer metal jacket against the portion of the mandrel as the nut is tightened to the body of the connector during installation of the connector to the prepared cable end.


35 Claims, 3 Drawing Sheets

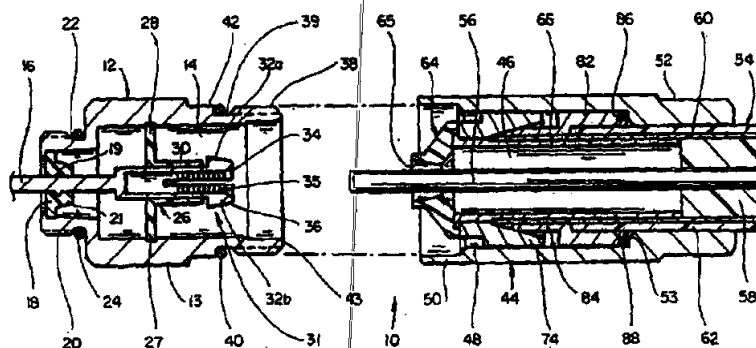

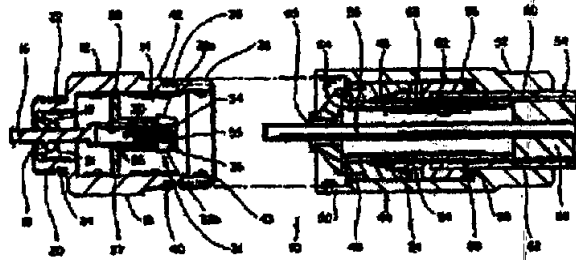

WO9014697

Which is the same as US patent
below

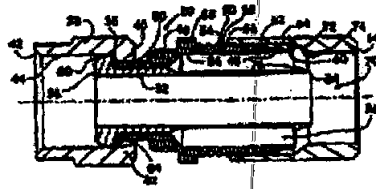


http://www.wipo.int/pctdb/images/PCT-IMAGES/16121999/US9912596_16121999_pub_pfx.g4-b.jpg

WO/1999/065117



WO/1999/065118

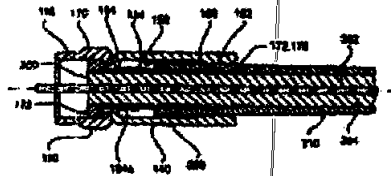

http://www.wipo.int/pctdb/images/PCT-IMAGES/20112003/US0314805_20112003_gz_en.x4-b.jpg

WO/2003/096484

JTR, JURY

**U.S. District Court
Eastern District of Arkansas (Little Rock)
CIVIL DOCKET FOR CASE #: 4:09-cv-00939-SWW
Internal Use Only**

Perfect 10 Antenna Company et al v. John Mezzalingua
Associates Inc
Assigned to: Judge Susan Webber Wright
Cause: 28:2201 Declaratory Judgement

Date Filed: 12/16/2009
Jury Demand: Plaintiff
Nature of Suit: 830 Patent
Jurisdiction: Federal Question

Plaintiff**Perfect 10 Antenna Company**

represented by **Charles D. Davidson**
Davidson Law Firm, Ltd.
Post Office Box 1300
Little Rock , AR 72203-1300
(501) 374-9977
Email: skipd@dlf-ar.com
LEAD ATTORNEY
ATTORNEY TO BE NOTICED

Plaintiff**DS Engineering LLC**


represented by **Charles D. Davidson**
(See above for address)
LEAD ATTORNEY
ATTORNEY TO BE NOTICED

V.

Defendant

John Mezzalingua Associates Inc
doing business as
Production Products Company
also known as
PPC


Date Filed	#	Docket Text
12/16/2009		Judge Susan Webber Wright added. (hmr) (Entered: 12/16/2009)
12/16/2009	<u>1</u>	COMPLAINT with Jury Demand against John Mezzalingua Associates Inc filed by Perfect 10 Antenna Company, DS Engineering LLC. Filing fee \$350 paid, receipt #LIT020448; summons issued and returned to counsel for service. (hmr) (Entered: 12/16/2009)
12/16/2009		(Court only) ***Set Jury and Magistrate Flags. (hmr) (Entered: 12/16/2009)




http://www.wipo.int/pctdb/images/PCT-IMAGES/09092005/US2005002079_09092005_gz_en.x4-b.jpg
http://www.wipo.int/pctdb/images/PCT-IMAGES/16121999/US9912745_16121999_pub_pfx.g4-b.jpg

WO/2005/083845


Mezzalingua patent 7,118,416.

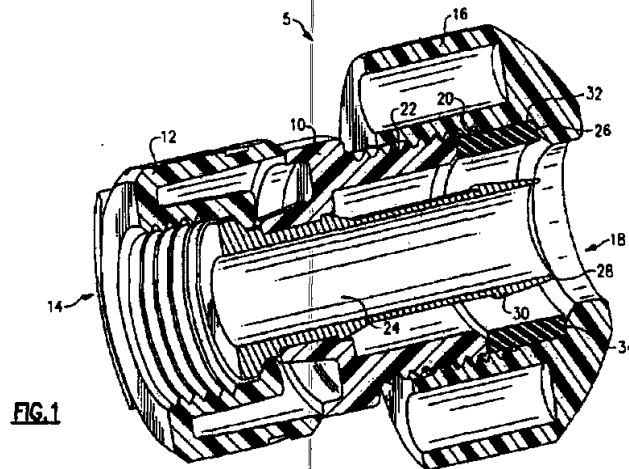

Hung patent 6,767,248 had the idea first:

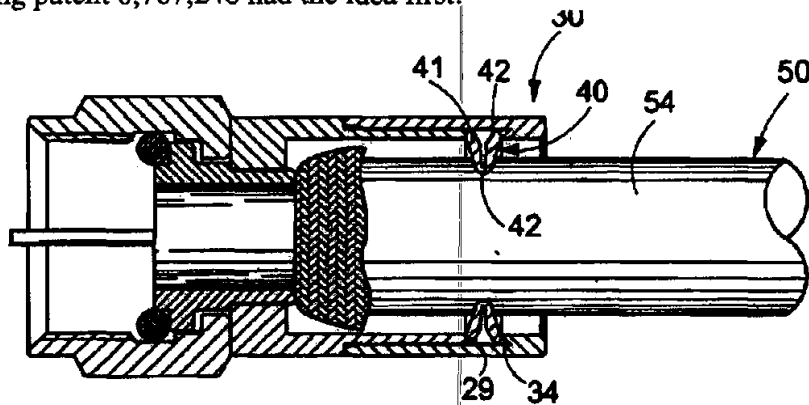


Siebelist patent 3,678,446:

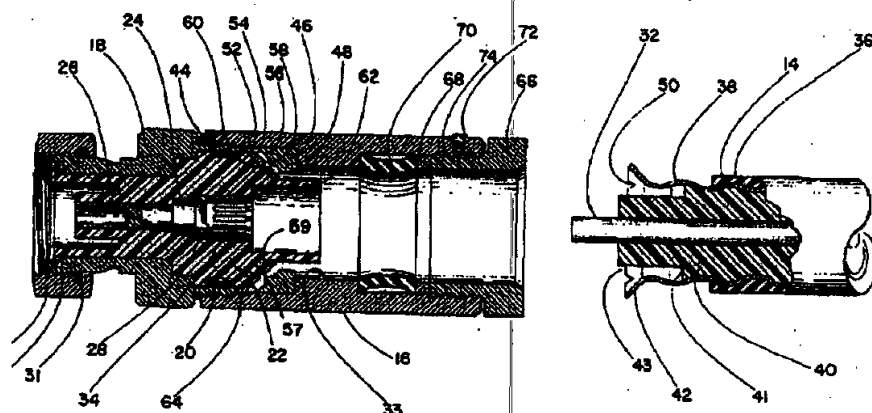


The Siebelist and Hung references were cited on the Mezzalingua file,

Skip Davidson
 RE: Privileged
 August 7, 2009

Nepovim patent 3,846,738 - sleeve 84 is interiorly located at the fitting rear, within an analogous "cavity" as recited by Mezzalingua. Also, an arguably analogous "plug" 22 meets the coax front conductor:

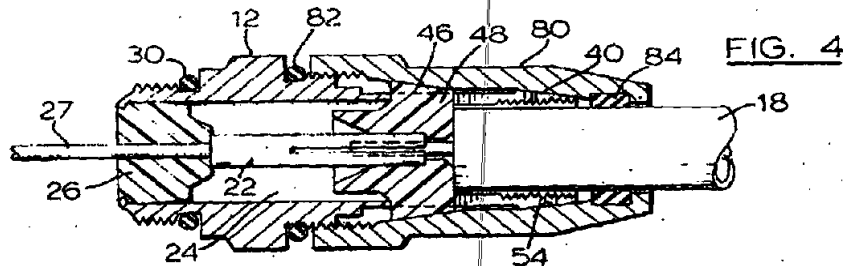


patent 3,986,737 issued in 1965 that shows a blatantly similar elastomeric sleeve "M" that seals two coaxially joined members upon compression:

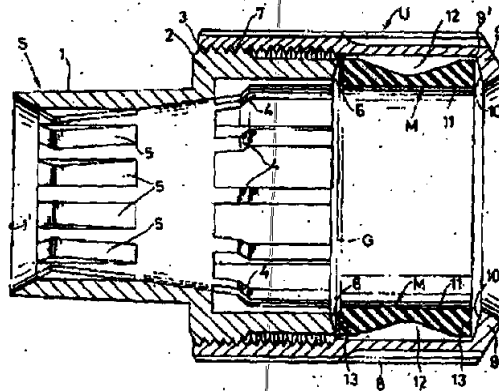


Skip Davidson
RE: Privileged
August 7, 2009

Second, un-cited Horak patent 3,879,102 issued in 1975 has an analogous compressible sleeve 18 that forms a

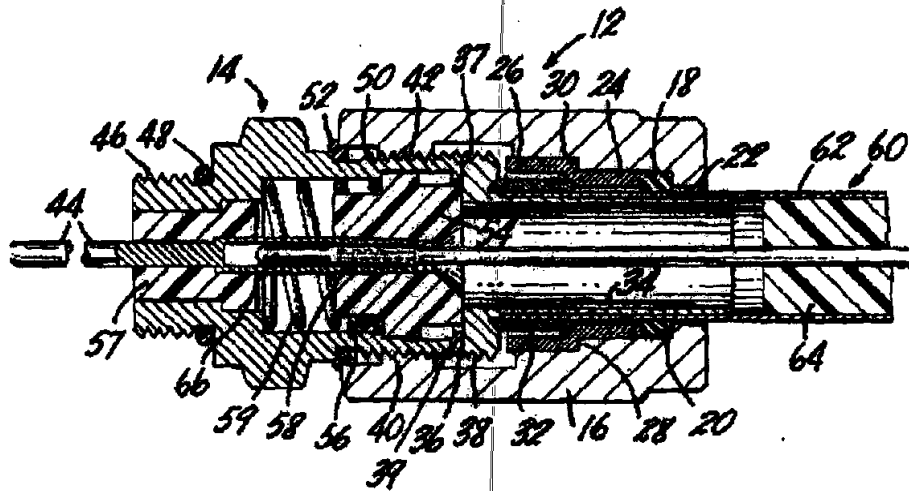


U. S. Patent 3,199,061 that issued in 1965, a tubular, resilient sleeve 36 is coaxially fitted within the compressible connector at the rear, proximate an end cap. When the fitting is compressed, the sleeve 36 presses the captivated coax around an analogous post 14 coaxially disposed within the connector:

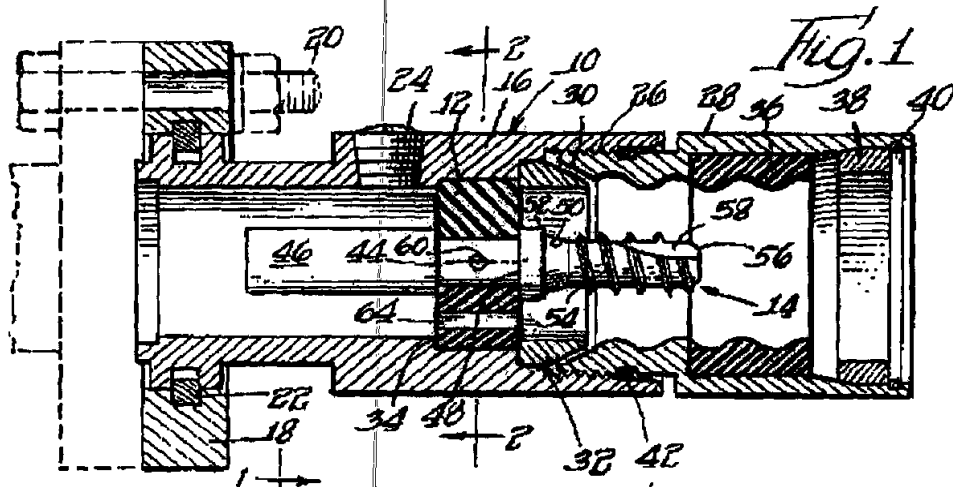


Skip Davidson
RE: Privileged
August 7, 2009

WO 93/24973 before compression:

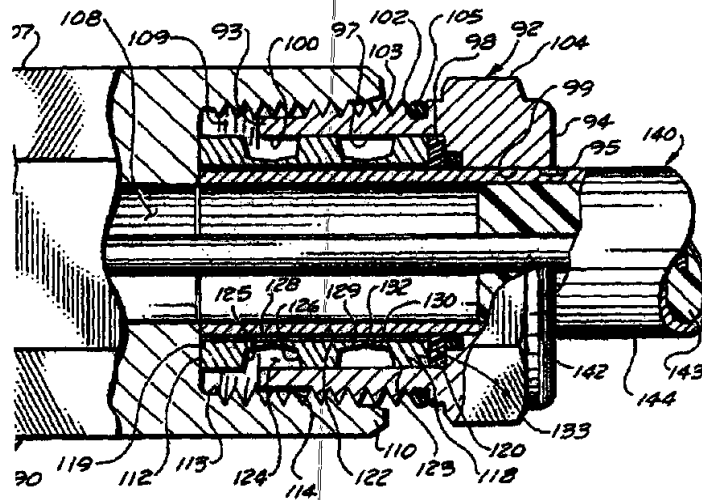

WO 93/24973 after compression:

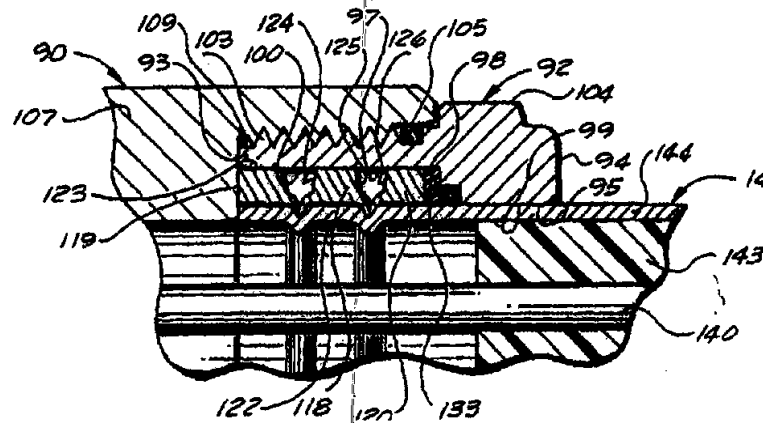

US007513795B1

**(12) United States Patent
Shaw****(10) Patent No.: US 7,513,795 B1
(45) Date of Patent: Apr. 7, 2009****(54) COMPRESSION TYPE COAXIAL CABLE
F-CONNECTORS****(75) Inventor: Glen David Shaw, Conway, AR (US)****(73) Assignee: ~~DC Engineering, LLC~~, North Little
Rock, AR (US)****(*) Notice:** Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.**(21) Appl. No.: 12/002,261****(22) Filed: Dec. 17, 2007****(51) Int. Cl.
H01R 9/05 (2006.01)****(52) U.S. CL. 439/578; 439/583; 439/584;
439/585****(58) Field of Classification Search 439/578,
439/583-585**
See application file for complete search history.**(56) References Cited****U.S. PATENT DOCUMENTS**


D148,897 S 3/1948 Ward
D181,302 S 10/1957 Logan
3,686,623 A 8/1972 Nijman
3,710,005 A 1/1973 French
D241,341 S 9/1976 Oxley
4,593,964 A 6/1986 Forney, Jr.
4,684,201 A 8/1987 Hutter
4,746,305 A 5/1988 Nomura
RE32,787 E 11/1988 Gallusser
4,834,675 A 5/1989 Samchusen
D313,222 S 12/1990 Takizawa
4,990,106 A 2/1991 Szegda
5,024,606 A 6/1991 Ming
D327,872 S 7/1992 McMills
D339,568 S 9/1993 Salz
5,389,012 A 2/1995 Huang
5,470,257 A 11/1995 Szegda
5,632,651 A 5/1997 Szegda
5,820,408 A 10/1998 Wang

5,863,226 A 1/1999 Lan
5,934,137 A 8/1999 Tarpill
5,975,949 A 11/1999 Holliday
6,065,976 A 5/2000 Wang
6,113,431 A 9/2000 Wong
6,139,344 A 10/2000 Wang
6,146,197 A 11/2000 Holliday
6,153,830 A 11/2000 Montana
6,159,046 A 12/2000 Wong
D436,076 S 1/2001 Montana
6,179,656 B1 1/2001 Wong
D437,826 S 2/2001 Montana
D440,539 S 4/2001 Montana
D440,939 S 4/2001 Montana

(Continued)

**Primary Examiner—Tho D Ta
(74) Attorney, Agent, or Firm—Stephen D. Carver****(57) ABSTRACT**

Axially compressible, high bandwidth F-connectors designed for conventional installation hand tools for interconnection with coaxial cable. Each connector has a rigid nut that is axially and rotatably secured to a molded plastic, tubular body. A rigid, conductive post coaxially extends through the connector, linking the nut and body. A post barbed end penetrates the cable within the connector. The body has a tubular shank with an obstruction-free surface and an integral stop ring. A tubular, metallic end cap is slidably fitted to the body shank, and thereafter forcibly compressed lengthwise, with travel limited by the stop ring. No detented structure is formed on the body, and the end cap can irreversibly assume any position, being held by end cap teeth. A tactile system comprising convex projections on the stop ring complemented by a resilient O-ring on the end cap helps installers determine correct placement through the sense of touch.

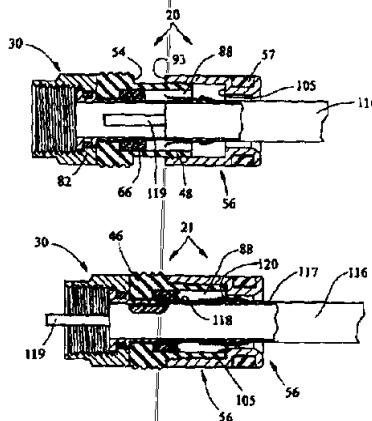7 Claims, 11 Drawing Sheets

US 7,513,795 B1

Page 2

U.S. PATENT DOCUMENTS

6,234,838 B1	5/2001	Wong	
6,386,912 B1	5/2002	Li	
D458,904 S	6/2002	Montena	
D460,739 S	7/2002	Fox	
D461,166 S	8/2002	Montena	
D461,167 S	8/2002	Montena	
D461,778 S	8/2002	Fox	
D462,058 S	8/2002	Montena	
D462,060 S	8/2002	Fox	
D462,327 S	9/2002	Montena	
6,478,618 B2	11/2002	Wong	
D468,696 S	1/2003	Montena	
6,530,807 B2	3/2003	Rodrigues	
6,558,194 B2	5/2003	Montena	
D475,975 S	6/2003	Fox	
D475,976 S	6/2003	Montena	
D475,977 S	6/2003	Montena	
6,716,062 B1	4/2004	Palinkas	
6,733,336 B1	5/2004	Montena	
6,767,247 B2	7/2004	Rodrigues	
6,767,248 B1 *	7/2004	Hung	439/578
6,767,249 B1	7/2004	Li	
6,769,926 B1	8/2004	Montena	
6,776,657 B1	8/2004	Hung	
6,780,052 B2	8/2004	Montena	
6,817,897 B2	11/2004	Chee	
6,848,940 B2	2/2005	Montena	
D503,685 S	4/2005	Montena	
D504,113 S	4/2005	Montena	
D504,114 S	4/2005	Montena	
D504,402 S	4/2005	Montena	
6,884,113 B1	4/2005	Montena	
D505,391 S	5/2005	Rodrigues	
D506,446 S	6/2005	Montena	
6,908,337 B1	6/2005	Li	
6,910,919 B1	6/2005	Hung	
D507,242 S	7/2005	Montena	
6,929,507 B2	8/2005	Lin	
D511,497 S	11/2005	Murphy	
D511,498 S	11/2005	Holliday	
D512,024 S	11/2005	Murphy	
D512,689 S	12/2005	Murphy	
D513,406 S	1/2006	Rodrigues	
D513,736 S	1/2006	Fox	
D514,071 S	1/2006	Vahey	
D515,037 S	2/2006	Fox	
7,018,235 B1 *	3/2006	Burris et al.	439/584
D518,772 S	4/2006	Fox	
D519,076 S	4/2006	Fox	
D519,451 S	4/2006	Fox	
D519,452 S	4/2006	Rodrigues	
D519,453 S	4/2006	Rodrigues	
D519,463 S	4/2006	Tamezane	
7,021,965 B1	4/2006	Montena	
D521,454 S	5/2006	Murphy	
D521,930 S	5/2006	Fox	
7,063,551 B1	6/2006	Lin	
D535,259 S	1/2007	Rodrigues	
7,192,308 B2	3/2007	Rodrigues	
D543,948 S	6/2007	Montena	
D544,837 S	6/2007	Disbennett	
7,241,172 B2	7/2007	Rodrigues	
7,364,462 B2 *	4/2008	Holland	439/584
2002/0146935 A1	10/2002	Wong	
2004/0147164 A1	7/2004	Li	

* cited by examiner

U.S. Patent

Apr. 7, 2009

Sheet 1 of 11

US 7,513,795 B1

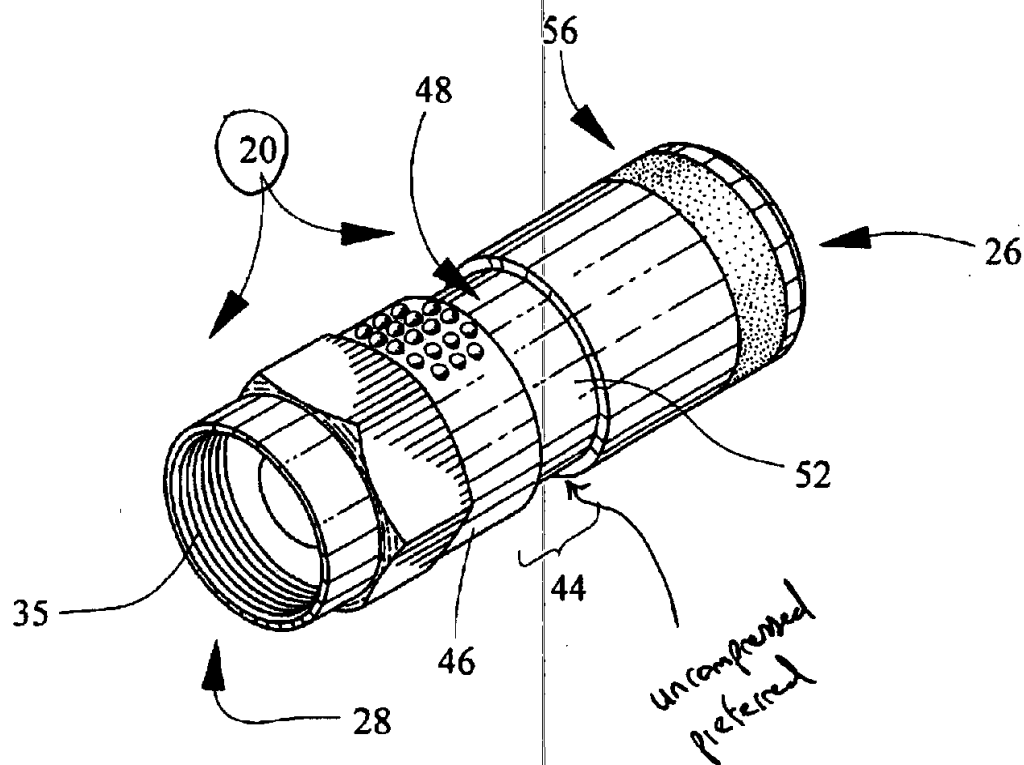






Fig. 1

U.S. Patent

Apr. 7, 2009

Sheet 2 of 11

US 7,513,795 B1

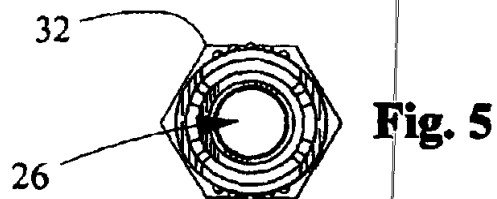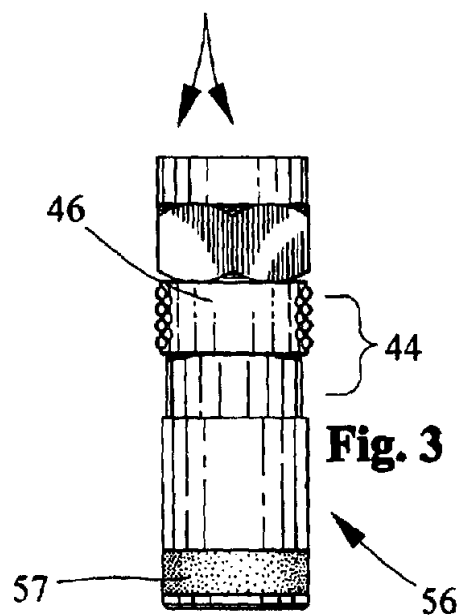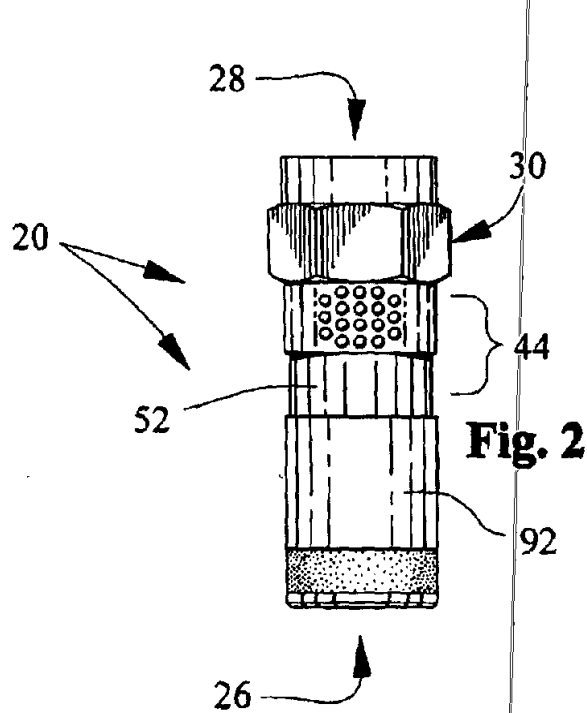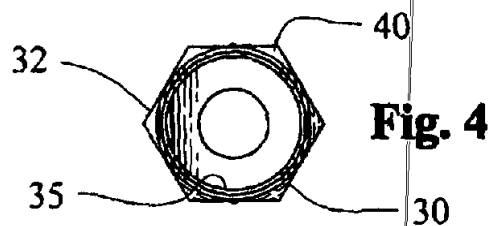

U.S. Patent

Apr. 7, 2009

Sheet 3 of 11

US 7,513,795 B1

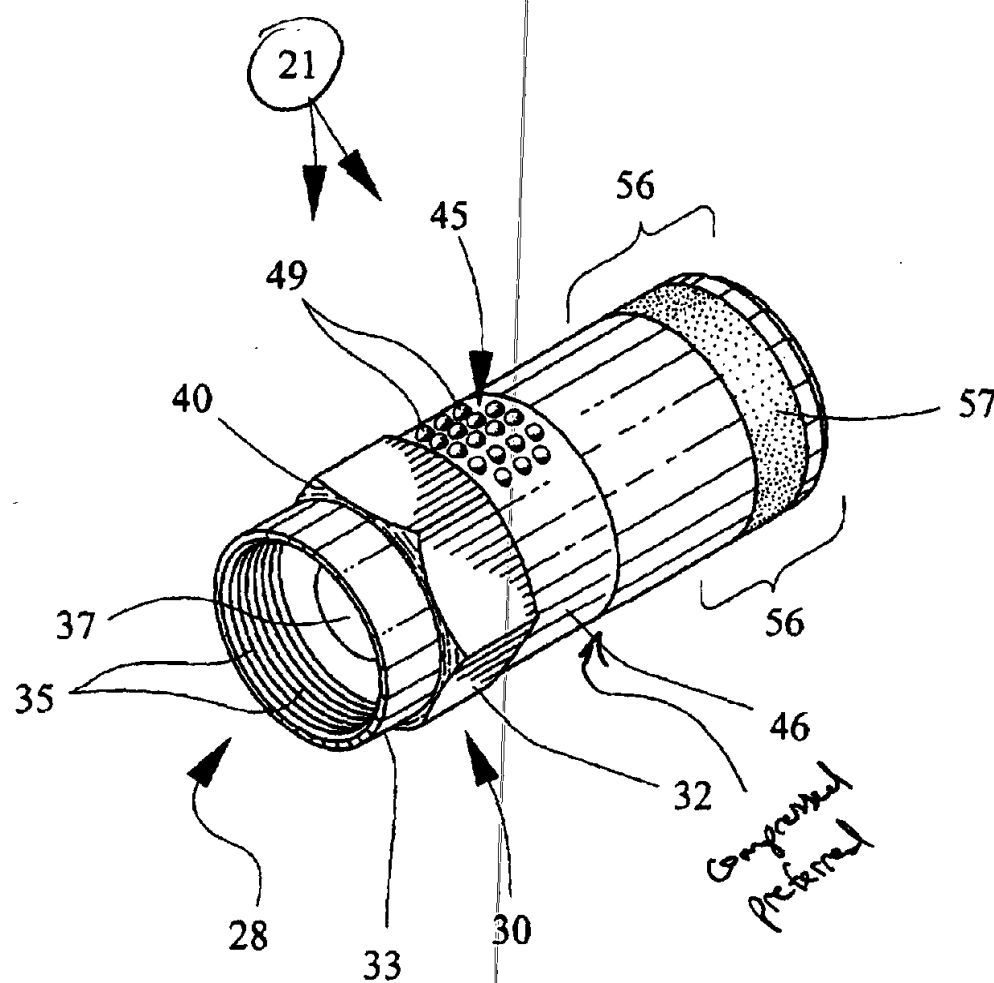


Fig. 6

FILED
U.S. DISTRICT COURT
EASTERN DISTRICT OF ARKANSAS

DEC 16 2009

IN THE UNITED STATES DISTRICT COURT
FOR THE
EASTERN DISTRICT OF ARKANSAS
WESTERN DIVISION

JAMES W. MCORMACK, CLERK
By: Hunter Robinson
DEP. CLERK

PERFECT 10 ANTENNA COMPANY and
DS ENGINEERING, LLC.

PLAINTIFFS

v.

Case No. 4:09-cv-939-SWW

JOHN MEZZALINGUA ASSOCIATES, INC. D/B/A
PRODUCTION PRODUCTS COMPANY AKA
PPC

This case assigned to District Judge Wright
and to Magistrate Judge Ray

DEFENDANT

**COMPLAINT FOR DECLARATORY RELIEF
AND TRADEMARK INFRINGEMENT**

COMES NOW Plaintiffs Perfect 10 Antenna Company (hereinafter "Perfect 10"), and DS Engineering, LLC (hereinafter "DS" and sometimes referred to collectively as "P10/DS") by and through their attorneys, Davidson Law Firm, Ltd. and for their Complaint for Declaratory Relief and Trademark Infringement against Defendant John Mezzalingua Associates, Inc. d/b/a Production Products Company, also known as PPC (hereinafter collectively "Mezzalingua/PPC"), allege as follows:

JURISDICTION AND VENUE

1. At issue in this matter are U.S. Patent 7,118,416 (hereinafter the "416 Patent") and DS's US Patent 7,513,795 B1 (hereinafter the "795 Patent") and Perfect 10's trademarks including U.S. Trademark Registration No. 2290984. A true and correct copy of U.S. Patent 7,118,416 is attached hereto as Exhibit "A." A true and correct copy of the US Patent 7,513,795 is attached hereto as Exhibit "B". A true and correct copy of U.S. Trademark Registration No. 2290984 is attached hereto as Exhibit "C."

U.S. Patent

Apr. 7, 2009

Sheet 4 of 11

US 7,513,795 B1

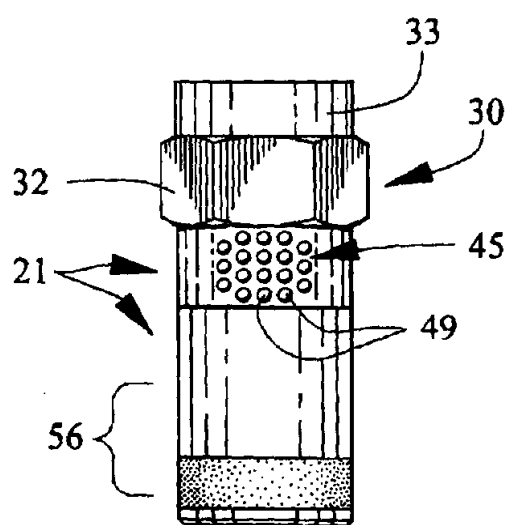


Fig. 7

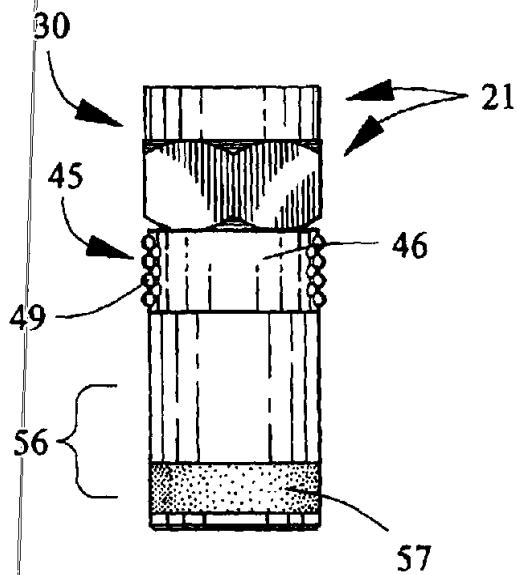


Fig. 8

U.S. Patent

Apr. 7, 2009

Sheet 5 of 11

US 7,513,795 B1

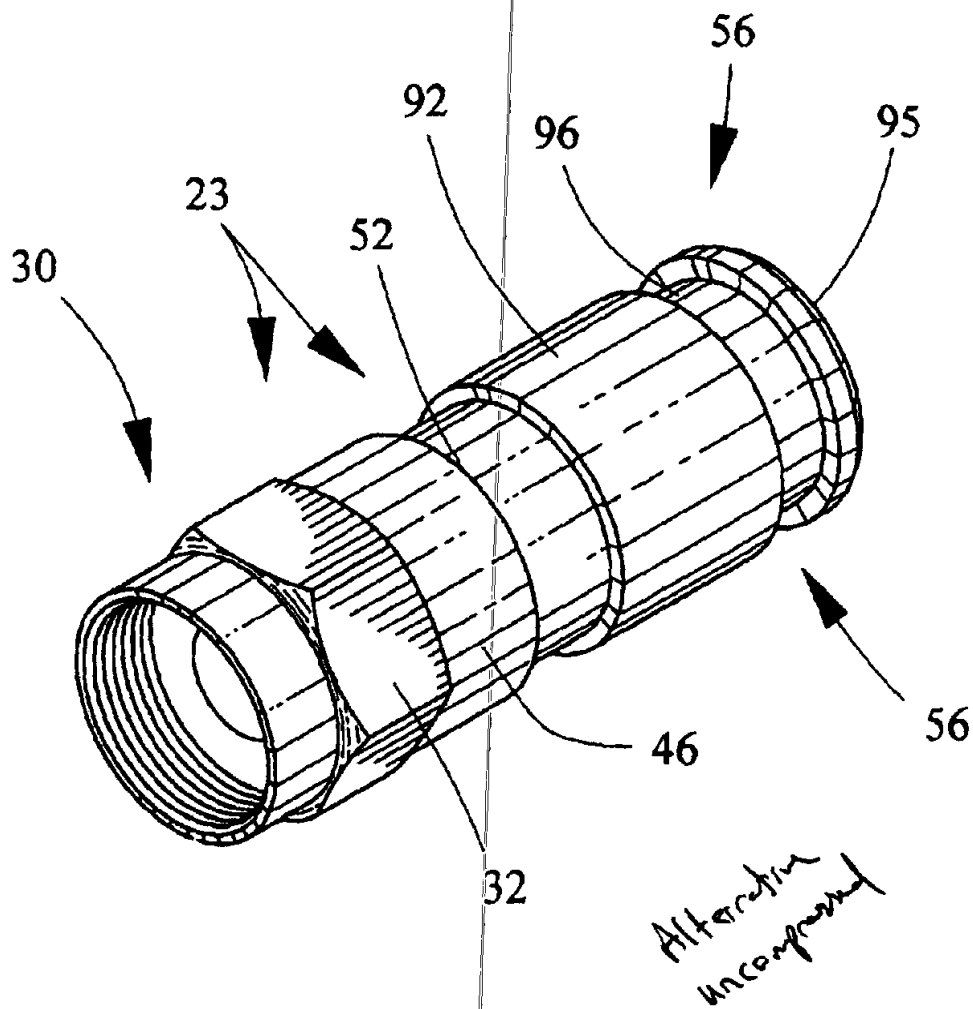


Fig. 9

U.S. Patent

Apr. 7, 2009

Sheet 6 of 11

US 7,513,795 B1


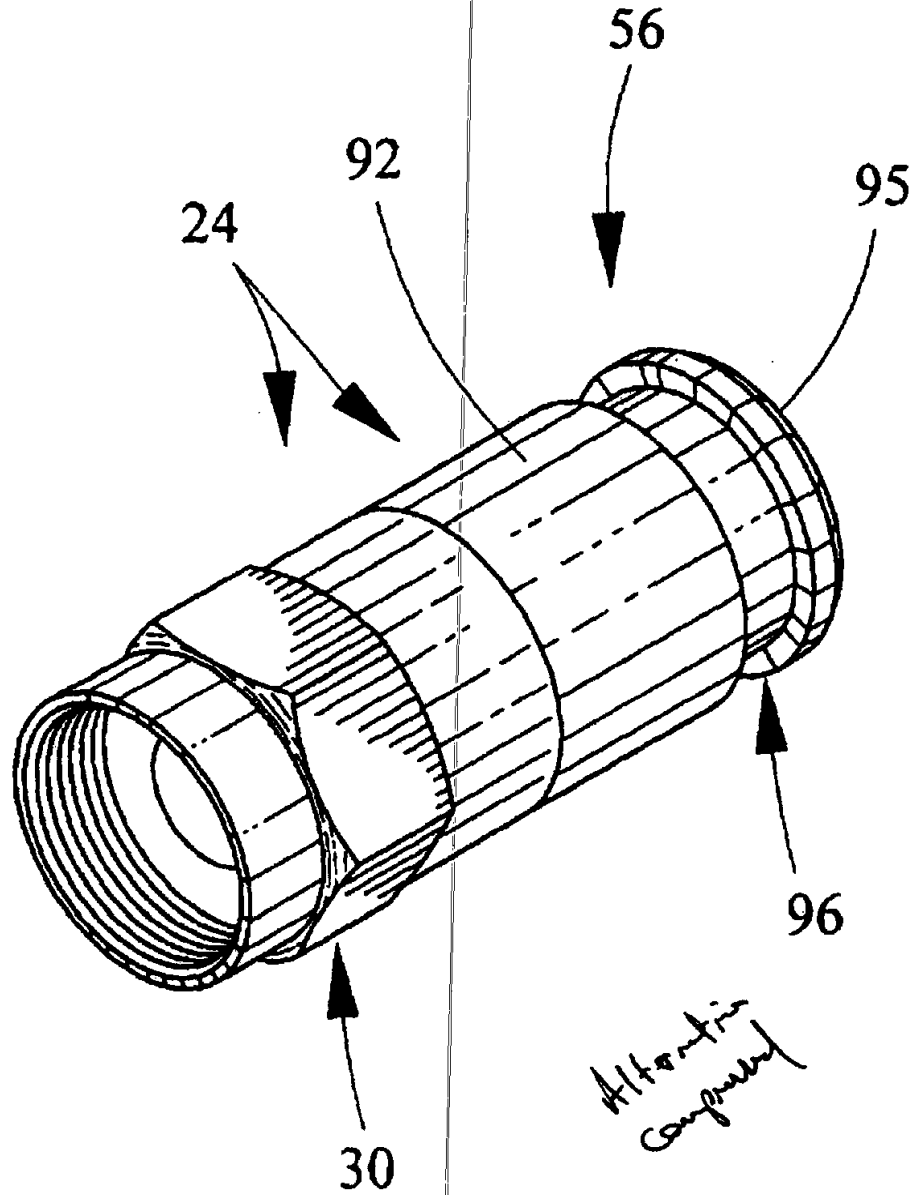


Fig. 10

Fig. 11

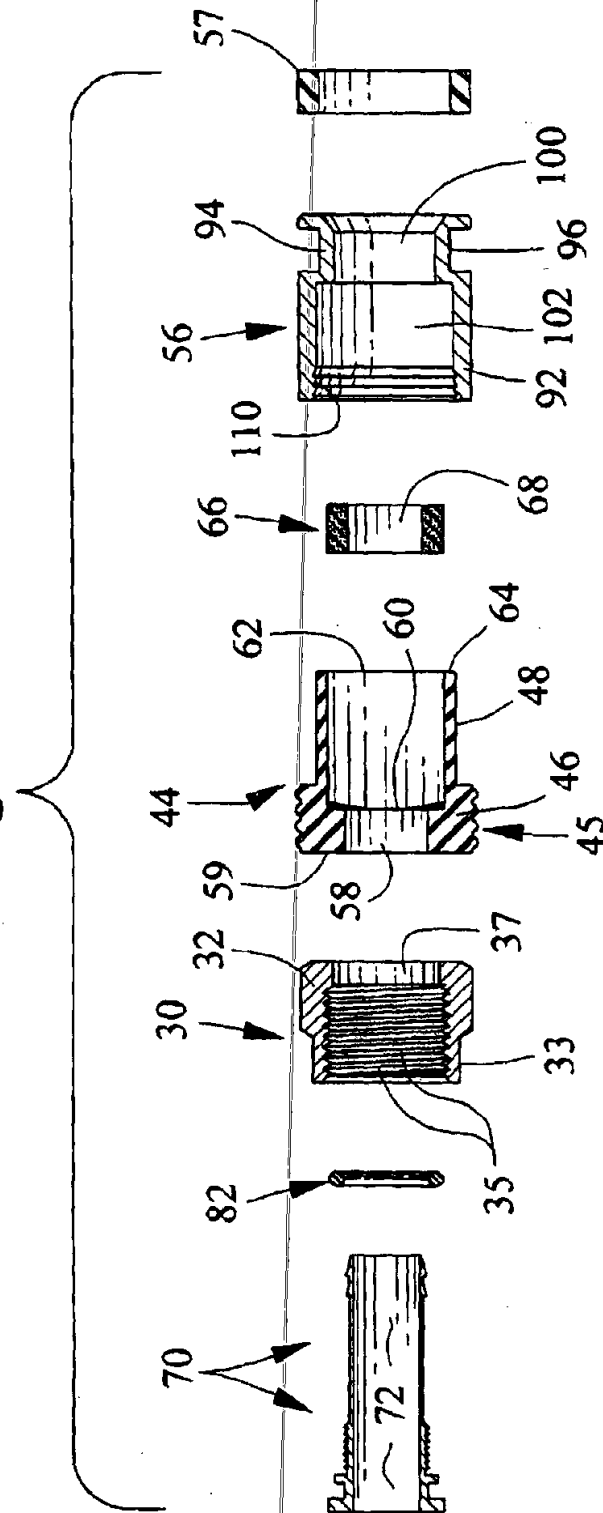

Preferred

U.S. Patent

Apr. 7, 2009

Sheet 8 of 11

US 7,513,795 B1

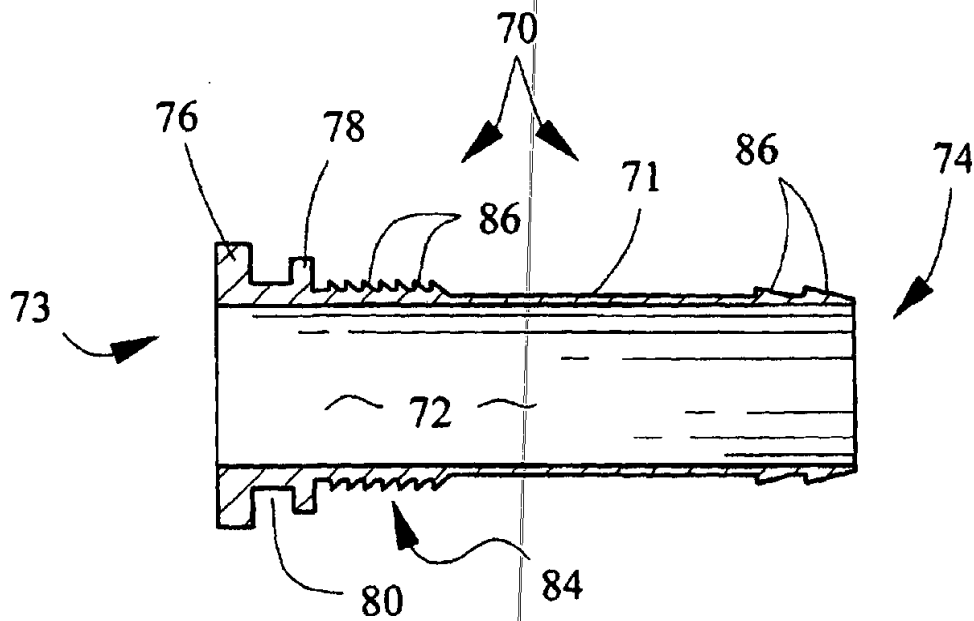


Fig. 12

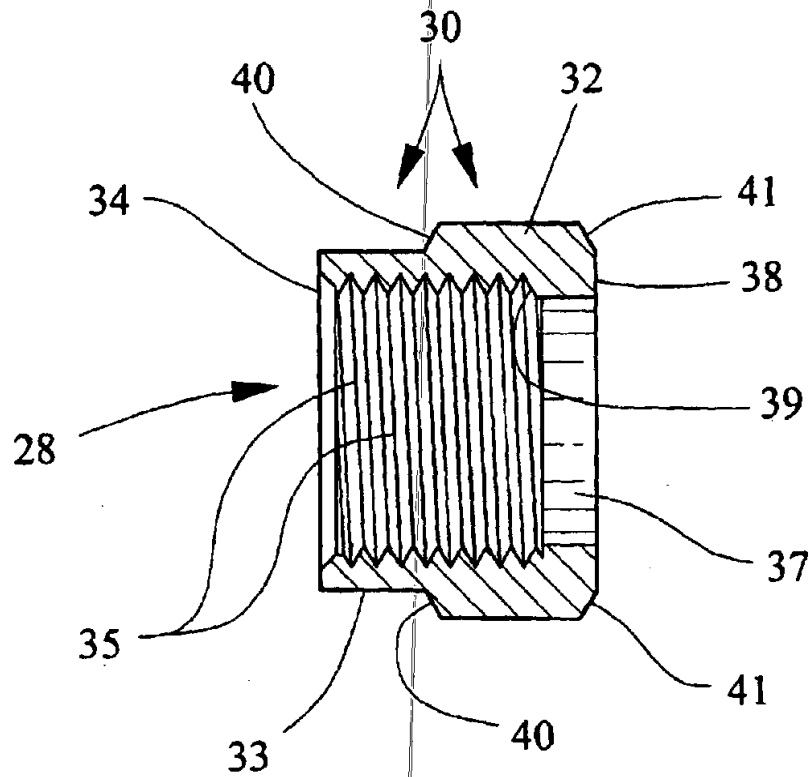




Fig. 13

U.S. Patent

Apr. 7, 2009

Sheet 9 of 11

US 7,513,795 B1

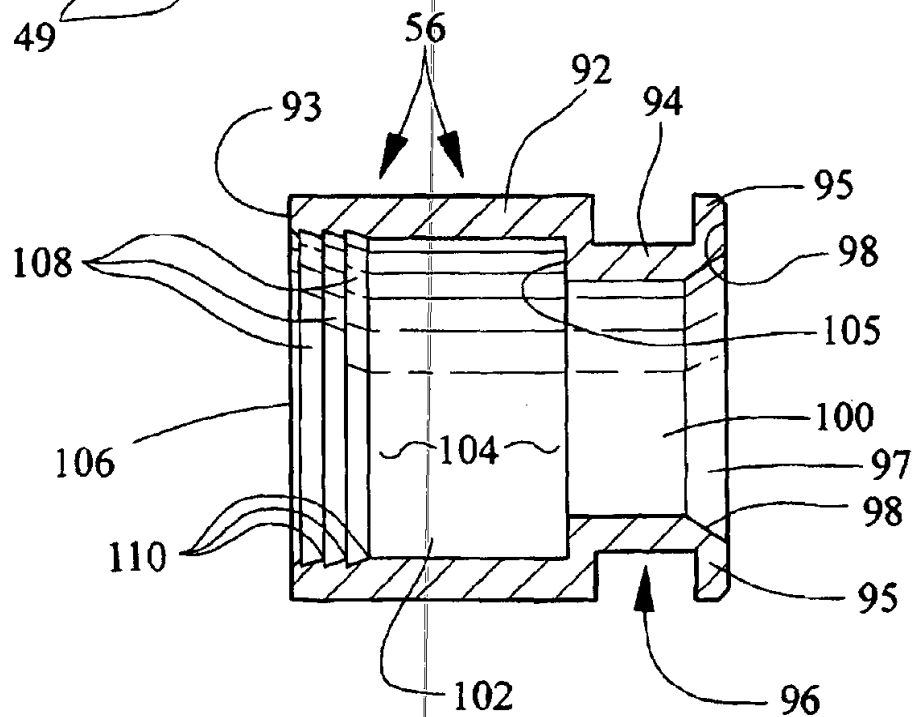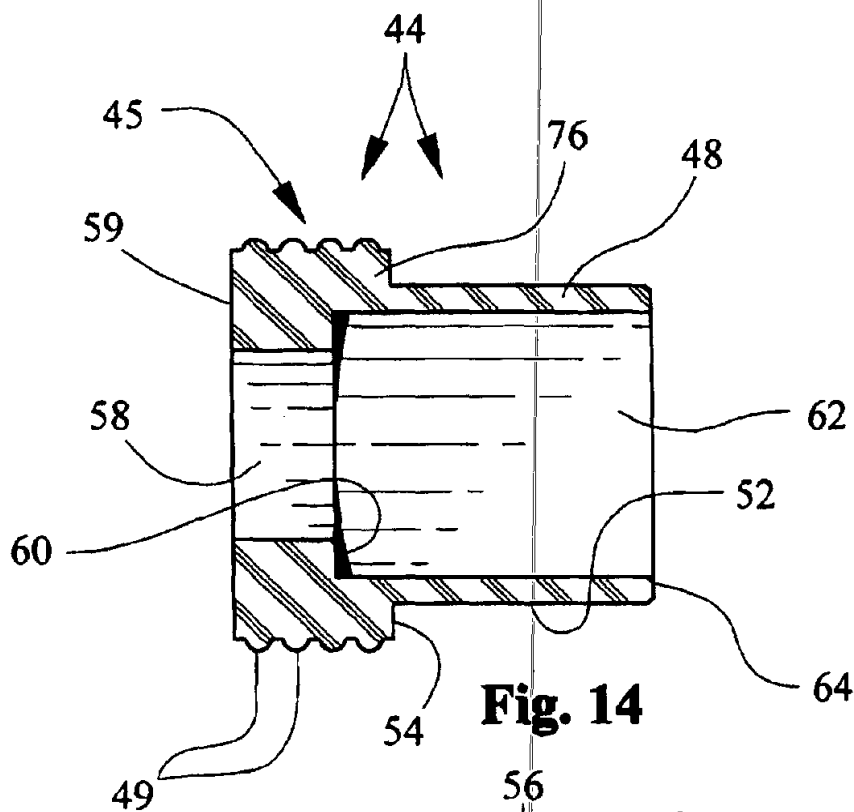

U.S. Patent

Apr. 7, 2009

Sheet 10 of 11

US 7,513,795 B1

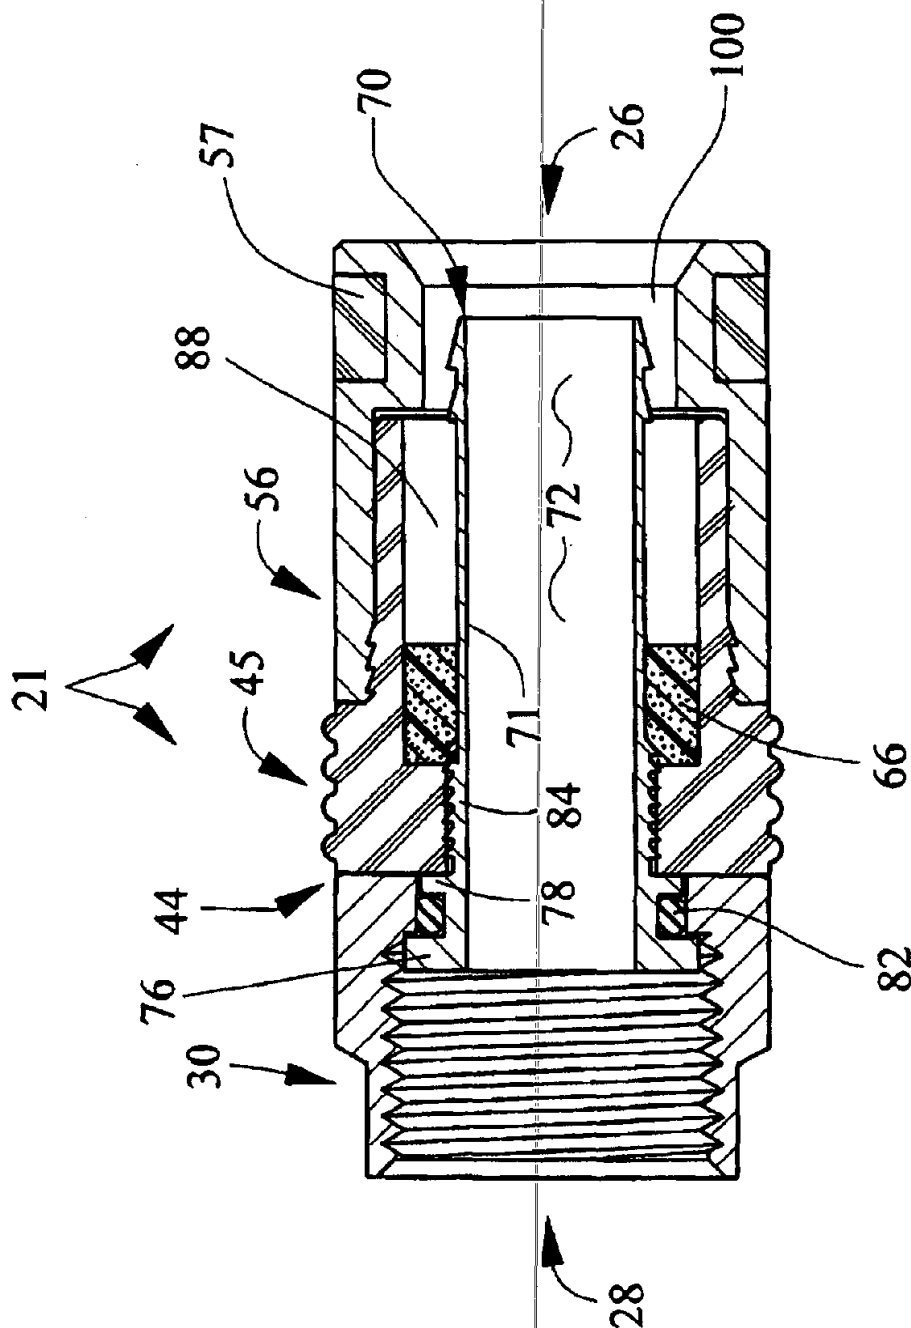


Fig. 16

U.S. Patent

Apr. 7, 2009

Sheet 11 of 11

US 7,513,795 B1

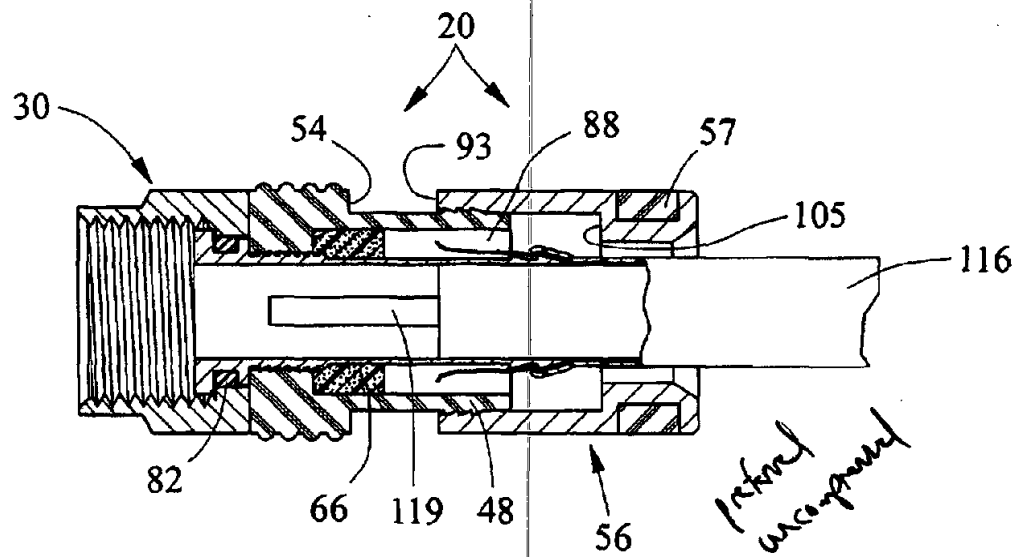


Fig. 17

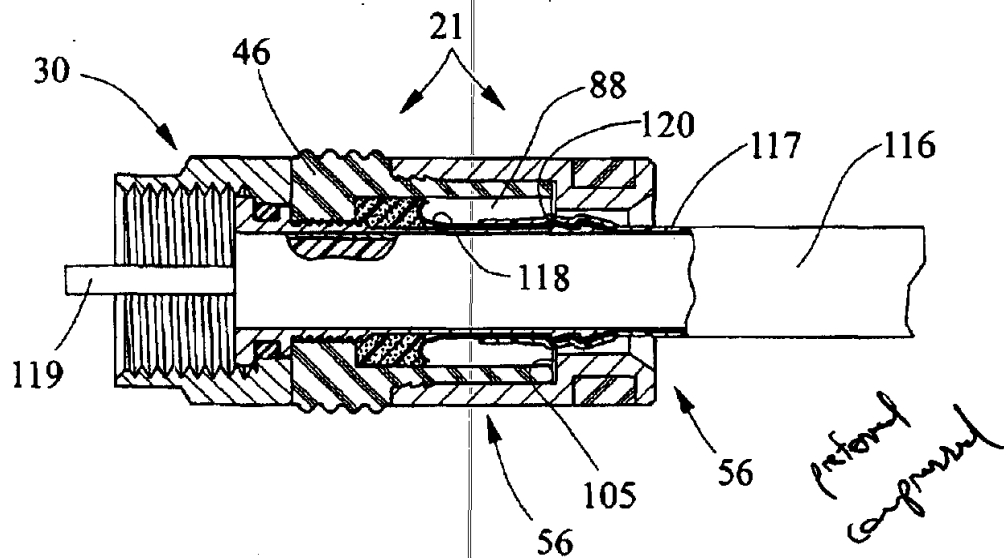


Fig. 18

US 7,513,795 B1

1

COMPRESSION TYPE COAXIAL CABLE F-CONNECTORS

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to electrical connectors for coaxial cables and related electrical fittings. More particularly, the present invention relates to coaxial F-connectors of the axial compression type which are adapted to be installed with hand compression tools. Known prior art of relevance is classified in U.S. Pat. No. Class 439, Subclasses 583 and 584.

2. Description of the Related Art

A variety of coaxial cable connectors have been developed in the electronic arts for interfacing coaxial cable with various fittings. Famous older designs that are well known in the art, such as the Amphenol PL-259 plug, require soldering and the hand manipulation of certain components during installation. One advantage of the venerable PL-259 includes the adaptability for both coaxial cables of relatively small diameter, such as RG-59U or RG-58U, and large diameter coaxial cable (i.e., such as RG-8U, RG-9U, LMR-400 etc.). So-called N-connectors also require soldering, but exhibit high frequency advantages. Numerous known connectors are ideal for smaller diameter coaxial cable, such as RG-58U and RG-59U. Examples of the latter include the venerable "RCA connector", which also requires soldering, and the well known "BNC connector", famous for its "bayonet connection", that also requires soldering with some designs.

Conventional coaxial cables typically comprise a solid or stranded center conductor surrounded by a plastic, dielectric insulator and a coaxial shield of braided copper and foil. An outer layer of insulation, usually black in color, coaxially surrounds the cable. To prepare coaxial cable for connector installation, a length of the outer jacket is removed, exposing a portion of the shield that is drawn back and coaxially positioned. A portion of the insulated center is stripped so that an exposed portion of the inner copper conductor can become the male prong of the assembled F-connector.

The modern F-type coaxial cable connector has surpassed all other coaxial connector types in volume. These connectors are typically used in conjunction with smaller diameter coaxial cable, particularly RG-6 cable and the like. The demand for home and business wiring of cable TV system, home satellite systems, and satellite receiving antenna installations has greatly accelerated the use of low-power F-connectors. Typical F-connectors comprise multiple pieces. Typically, a threaded, hex-head nut that screws into a suitable socket commonly installed on conventional electronic devices such as televisions, satellite receivers and accessories, satellite radios, and computer components and peripherals. The connector body mounts an inner, generally cylindrical post that extends coaxially rearwardly from the hex nut. When a prepared end of the coax is inserted, the post penetrates the cable, sandwiching itself between the insulated cable center and the outer conductive braid. A deflectable, rear locking part secures the cable within the body of the connector after compression. The locking part is known by various terms in the art, including "cap", or "bell" or "collar" or end sleeve and the like. The end cap, which may be formed of metal or a resilient plastic, is compressed over or within the connector body to complete the connection. A seal is established by one or more O-rings or grommets. Suitable grommets may comprise a silicone elastomer.

The design of typical modern F-connectors is advantageous. First, typical assembly and installation of many F-con-

2

nectors is completely solderless. As a result, installation speed increases. Further, typical F-connectors are designed to insure good electrical contact between components. The outer conductive braid for the coaxial cable, for example, is received within the F-connector, and frictional and/or compressive contact insures electrical continuity. For satellite and cable installations the desired F-connector design mechanically routes the inner, copper conductor of the coaxial cable through the connector body and coaxially out through the mouth of the connector nut to electrically function as the male portion of the connector junction without a separate part.

An important F-connector design innovation relates to the "compression-type" F-connector. Such designs typically comprise a metallic body pivoted to a hex-head nut for electrical and mechanical interconnection with a suitably threaded socket. A rigid conductive post is coaxially disposed within the connector body, and is adapted to contact the conductive outer braid of the coax when the prepared cable end is installed. After insertion of the stripped end of the coax, the rear connector cap or collar is forcibly, axially compressed relative to the connector body. A suitable hand operated compression tool designed for compression F-connectors is desirable. Some connector designs have an end cap adapted to externally mount the body, and some designs use a rear cap that internally engages the F-connector body. In some designs the cap is metal, and in others it is plastic. In any event, after the cap is compressed, the braided shield is electrically connected and mechanically secured, and a tip of the exposed copper center conductor properly extends from the connector front. The outer conductive braid is compressively forced against internal metal components to insure proper electrical connections.

One popular modern trend with compression F-connectors involves their preassembly and packaging. In some preassembled designs the rear sleeve (i.e., or end cap, collar etc.) is compressively forced part-way onto or into the connector body prior to bulk packaging. The end sleeve is pre-connected to the connector end by the manufacturer to ease the job of the installer by minimizing or avoiding installation assembly steps. For example, when the installer reaches into his or her package of connectors, he or she need draw out only one part, or connector, and need not sort connector bodies from connector end caps or sleeves and assemble them in the field, since the device end cap is already positioned by the manufacturer. Because of the latter factors, installation speed is increased, and component complexity is reduced.

Typically, preassembled compression F-connector designs involve locking "detents" that establish two substantially fixed positions for the end cap along the length of the connector body. The cap, for example, may be provided with an internal lip that surmounts one or more annular ridges or grooves defined on the connector collar for the mechanical detent. In the first detent position, for example, the end cap yieldably assumes a first semi-fixed position coupled to the lip on the connector end, where it semi-permanently remains until use and installation. The connection force is sufficient to yieldably maintain the end cap in place as the F-connectors are manipulated and jostled about. During assembly, once a prepared cable end is forced through the connector and its end cap, the connector is placed within a preconfigured void within and between the jaws of a hand-operated compression installation tool, the handles of which can be squeezed to force the connector parts together. During compression, in detented designs, the end cap will be axially forced from the first detent position to a second, compressed and "installed" detent position.

US 7,513,795 B1

3

High quality F-connectors are subject to demanding standards and requirements. Modern home satellite systems distribute an extremely wide band signal, and as the demand for high definition television signals increases, and as more and more channels are added, the bandwidth requirements are becoming even more demanding. At present, F-connectors must reliably handle bandwidths approximating three GHz. As the significance of the latter factors increases, it becomes mandatory critical that the F-connector infallibly mate with the cable.

Disadvantages with prior art coaxial F-connectors are recognized. For example, moisture and humidity can interfere with electrical contact, degrading the signal pathway between the coax, the connector, and the fitting to which it is connected. For example, F-connectors use compression and friction to establish a good electrical connection between the braided shield of the coaxial cable and the connector body, as there is no soldering. Moisture infiltration, usually between the connector body and portions of the coaxial cable, can be detrimental. Signal degradation, impedance mismatching, and signal loss can increase over time with subsequent corrosion. Moisture infiltration often increases in response to mechanical imperfections resulting where coaxial compression connectors are improperly compressed.

Mechanical flaws caused by improper crimping or compression can also degrade the impedance or characteristic bandwidth of the connector, attenuating and degrading the required wide-band signal that modern TV satellite dish type receiving systems employ. If the axial compression step does not positively lock the end cap in a proper coaxial position, the end cap can shift and the integrity of the connection can suffer. Furthermore, particularly in modern, high-bandwidth, high-frequency applications involved with modern satellite applications distributing multiple high definition television channels, it is thought that radial deformation of internal coaxial parts, which is a natural consequence of radial compression F-connectors, potentially degrades performance.

Dealers and installers of satellite television equipment have created a substantial demand for stripping and installation tools for modern compression type F-connectors. However, installers typically minimize the weight and quantity of tools and connectors they carry on the job. There are a variety of differently sized and configured F-connectors, and a variety of different compression tools for installation.

On the one hand, F-connectors share the same basic shape and dimensions, as their connecting nut must mate with a standard thread, and the internal diameter of critical parts must accommodate standard coaxial cable. On the other hand, some compression F connectors jam the end sleeve or cap into the body, and some force it externally. Some connectors use a detent system, as mentioned above, to yieldably hold the end sleeve or cap in at least a first temporary position. Still other connectors require manual assembly of the end cap to the body of the connector. In other words, size differences exist in the field between the dimensions of different F-connectors, and the tools used to install them.

The typical installer carries as few tools as practicable while on the job. He or she may possess numerous different types of connectors. Particularly with the popularity of the "detented" type of compression F-connector, hand tools customized for specific connector dimensions have arisen. The internal compression volume of the hand tool must match very specific "before" and "after" dimensions of the connector for a precision fit. After a given compression F-connector is preassembled, then penetrated by the prepared end of a segment of coaxial cable, the tool must receive and properly "capture" the connector. The most popular compression tools

4

are known as "saddle" types, or "fully enclosed" types. In either event the tool must be sized to comfortably receive and "capture" connectors of predetermined external dimensions. Tools are designed for proper compression deflection, so the connector assumes a correct, reduced length after compression. Popular tools known in the art are available from the Ripley Company, model 'Universal FX', the 'LCCT-1' made by International Communications, or the ICM 'VT200' made by the PPC Company.

I have found that connector failures often result from small mechanical misalignments that result where the internal compression volume of the installation tool does not properly match the size of the captured connector. The degree of internal tool compression should closely correlate with the reduced length of the connector after axial deflection. In other words, the end sleeve or cap must be forcibly displaced a correct distance. Wear and tear over time can mismatch components. In other words, where hand tools designed for a specific connector length are used with connectors of slightly varying sizes, as would be encountered with different types or brands of connectors, improper and incomplete closure may result. Misdirected compression forces exerted upon the end cap or sleeve and the connector body or during compression can cause deformation and interfere with alignment. The asymmetric forces applied by a worn or mismatched saddle type compression tool can be particularly detrimental. Sometimes improper contact with internal grommets or O-rings results, affecting the moisture seal.

The chance that a given compression hand tool, used by a given installer, will mismatch the particular connectors in use at a given time is often increased when the connectors are of the "detent" type. Detented compression connectors, examples of which are discussed below, are designed to assume a predetermined length after both preassembly, and assembly. Thus detented F-connectors require a substantially mating compression tool of critical dimensions for proper performance. The chances that a given installer will install the requested compression F-connectors involved at a given job, or specified in a given installation contract, with the correctly sized, mating installation tool are less than perfect in reality. Another problem is that detented F-connector, even if sized correctly and matched with the correct installation tool, may not install properly unless the installer always exerts the right force by fully deflecting the tool handles. Even if a given installation tool is designed for the precise dimensions of the connectors chosen for a given job, wear and tear over the life of the hand tool can degrade its working dimensions and tolerances. Real world variables like these can conclude with an incorrectly installed connector that does not reach its intended or predetermined length after assembly.

If and when the chosen compression tool is not correctly matched to the F-connector, deformation and damage can occur during installation, particularly with detented compression F-connectors. Another problem occurs where an installer improperly positions the connector within the hand tool. Experienced installers, who may have configured and installed thousands of F-connectors over the years, often rely upon a combination of "look" and "feel" during installation when fitting connectors to the cable, and when positioning the connectors in the hand tool. Repetition and lack of attention tends to breed sloppiness and carelessness. Improper alignment and connector placement that can cause axial deformation. Sloppiness in preparing a cable end for the connector can also be detrimental.

A modern, compression type F-connector of the compression type is illustrated in U.S. Pat. No. 4,834,675 issued May 30, 1989 and entitled "Snap-n-seal Coaxial Connector." The

1st para

2. This Court has subject matter jurisdiction over Plaintiff's claims based upon the Federal Declaratory Judgment Act, 28 U.S.C. §§ 2201-2202, the Patent Laws of the United States, 35 U.S.C. § 100, *et seq.*, the Lanham Act of 1946, as amended, 15 U.S.C. § 1051, *et seq.*, and 28 U.S.C. §§ 1331 and 1338.

3. Venue is proper in this Court under 28 U.S.C. §§ 1391(c) and 1400(b).

4. This Court has personal jurisdiction over Defendant in that it does business within the state of Arkansas and within this District. Specifically, Defendant sells its products to consumers, dealers, distributors, installers, and wholesalers within the state of Arkansas and within this District.

THE PARTIES

5. Plaintiff, Perfect 10 is a corporation, organized and existing under the laws of the state of Arkansas with its principal place of business located at 3901 Progress Street, North Little Rock, Arkansas 72114. DS is a Delaware limited liability company having its principal place of business in Arkansas.

6. Upon information and belief, Defendant Mezzalingua/PPC is a corporation organized and existing under the laws of the state of Delaware and its principal place of business is located at 6176 East Molly Road, East Syracuse, New York 13057. Mezzalingua/PPC's agent for service is National Corporate Research, Ltd., 615 South DuPont Highway, Dover, Delaware 19901.

7. On information and belief, Production Products Company (or PPC) is a trade name of Mezzalingua and not a separate legal entity.

8. Mezzalingua/PPC sells its products to consumers, dealers, distributors, installers, and wholesalers within the state of Arkansas and within this District.

US 7,513,795 B1

5

connector has an annular compression sleeve, an annular collar which peripherally engages the jacket of a coaxial cable, an internal post coaxially disposed within the collar that engages the cable shield, and a rotatable nut at the front for connection. A displaceable rear cap is frangibly attached to the body front, and must be broken away for connector installation manually and then pre-positioned by the user on the connector end. The end cap is axially forced into coaxial engagement within the tubular compression sleeve between the jacket of the coaxial cable and the annular collar, establishing mechanical and electrical engagement between the connector body and the coaxial cable shield.

U.S. Pat. No. 5,632,651 issued May 27, 1997 and entitled "Radial compression type Coaxial Cable end Connector" shows a compression type coaxial cable end connector with an internal tubular inner post and an outer collar that cooperates in a radially spaced relationship with the inner post to define an annular chamber with a rear opening. A threaded head attaches the connector to a system component. A tubular locking cap protruding axially into the annular chamber through its rear is detented to the connector body and is displaceable axially between an open position accommodating insertion of the tubular inner post into a prepared cable end, with an annular outer portion of the cable being received in the annular chamber, and a clamped position fixing the annular cable portion within the chamber.

Similarly, U.S. Pat. No. 6,767,247 issued Jul. 27, 2004 depicts a compression F-connector of the detent type. A detachable rear cap or end sleeve temporarily snap fits or detents to a first yieldable position on the connector rear. This facilitates handling by the installer. The detachable end sleeve coaxially, penetrates the connector body when installed, and the coaxial cable shield is compressed between the internal connector post and the end sleeve.

U.S. Pat. No. 6,520,007 issued Mar. 11, 2003, and entitled "Coaxial connector having detachable Locking Sleeve" illustrates another modern compression F-connector. The connector includes a locking end cap provided in detachable, re-attachable snap engagement within the rear end of the connector body for securing the cable. The cable may be terminated to the connector by inserting the cable into the locking sleeve or the locking sleeve may be detachably removed from the connector body and the cable inserted directly into the cable body with the locking sleeve detached subsequently.

U.S. Pat. No. 5,470,257 issued Nov. 28, 1995 shows a detented, compression type coaxial cable connector. A tubular inner post is surrounded by an outer collar and linked to a hex head. The radially spaced relationship between the post and the collar defines an annular chamber into which a tubular locking cap protrudes, being detented in a first position that retains it attached to the connector. After the tubular inner post receives a prepared cable end, the shield locates within the annular chamber, and compression of the locking cap frictionally binds the parts together.

U.S. Pat. No. 6,153,830 issued Nov. 28, 2000 shows a compression F-connector with an internal post member, and a rear end cap that coaxially mounts over the cable collar or intermediate body portion. The internal, annular cavity coaxially formed between the post and the connector body is occupied by the outer conductive braid of the coaxial cable. The fastener member, in a pre-installed first configuration is movably fastened onto the connector body. The fastener member can be moved toward the nut into a second configuration in which the fastener member coacts with the connector body so that the connector sealingly grips the coaxial cable. U.S. Pat.

6

No. 6,558,194 issued May 6, 2003 and entitled "Connector and method of operation" and U.S. Pat. No. 6,780,052 issued Aug. 24, 2004 are similar.

U.S. Pat. No. 6,848,940 issued Feb. 1, 2005 shows a compression F-connector similar to the foregoing, but the compressible end cap coaxially mounts on the outside of the body.

Another detented compression F-connector is discussed in U.S. Pat. No. 6,848,940, issued Feb. 1, 2005 and entitled "Connector and method of Operation." The connector body coaxially houses an internal post that is coupled to the inner conductor of a coaxial cable. A nut is coupled to either the connector body or the post for the connecting to a device. The post has a cavity that accepts the center conductor and insulator core of a coaxial cable. The annulus between the connector body and the post locates the coaxial cable braid. The end cap or sleeve assumes a pre-installed first configuration temporarily but movably fastened to the connector body, a position assumed prior to compression and installation. The end cap can be axially forced toward the nut into an installed or compressed configuration in which it grips the coaxial cable.

Various hand tools that can crimp or compress F-connectors are known.

For example, U.S. Pat. No. 5,647,119 issued Jul. 15, 1997 and entitled "Cable terminating Tool" discloses a hand tool for compression type F-connectors. Pistol grip handles are pivotally displaceable. A pair of cable retainers pivotally supported on a tool holder carried by one of the handles releasably retains the cable end and a preattached connector in coaxial alignment with an axially moveable plunger. The plunger axially compresses the connector in response to handle deflection. The plunger is adjustable to adapt the tool to apply compression type connector fittings produced by various connector manufactures.

Another example is U.S. Pat. No. 6,708,396 issued Mar. 23, 2004 that discloses a hand-held tool for compressively installing F-connectors on coaxial cable. An elongated body has an end stop and a plunger controlled by a lever arm which forcibly, axially advances the plunger toward and away from the end stop to radially compress a portion of the connector into firm crimping engagement with the end of the coaxial cable.

Similarly, U.S. Pat. No. 6,293,004 issued Sep. 25, 2001 entitled "Lengthwise compliant crimping Tool" includes an elongated body and a lever arm which is pivoted at one end to the body to actuate a plunger having a die portion into which a coaxial cable end can be inserted. When the lever arm is squeezed, resulting axial plunger movements force a preassembled crimping ring on each connector to radially compress each connector into sealed engagement with the cable end, the biasing member will compensate for differences in length of said connectors.

BRIEF SUMMARY OF THE INVENTION

This invention provides improved, axial compression type F-connectors adapted to be quickly and reliably connected to coaxial cable. The new F-connectors are adapted to be readily manually manipulated for accurate placement within conventional compression hand tools for subsequent compressive installation.

Each connector has a rigid, metallic hex-headed nut for threadable attachment to conventional threaded devices. An elongated, preferably molded plastic body is rotatably and axially coupled to the nut. A rigid, conductive post coaxially extends through the nut and the tubular body, captivating the nut with an internal flange. A spaced apart end of the tubular

Excessive Background

US 7,513,795 B1

7

post is barbed, to penetrate and receive an end of prepared coaxial cable fitted to the F-connector. A rigid, preferably metallic end cap is slidably fitted to the body, and thereafter forcibly compressed along the length of the body shank for installation.

Preferably the tubular body has a generally cylindrical stop ring that is integral and coaxial with a reduced diameter shank. The elongated outer periphery of the body's shank is smooth and free of obstacles. No detented structure is formed upon or machined into the external shank surface. The end cap has a tubular portion that externally, coaxially mounts the body shank, and which can be axially compressed relative to the body, such that the end cap and body are telescoped relative to one another. The end cap smoothly, frictionally grips the shank of the body, and it may be positioned at any point upon the shank as desired. However, maximum displacement in response to compression is limited by the integral stop ring axially adjoining the shank.

In the best mode the connector body has a tactile means enabling an installer or handler to readily feel and detect when the connector is positioned right for subsequent installation. Preferably the annular stop ring has at least one tactile region prominently formed upon its circumference. In the best mode, there are two tactile regions, each comprising a plurality of upwardly projecting convex projections that are arranged in orderly rows and/or columns. To complement the tactile design it is preferred that the end cap be provided with a resilient ring, seated within a suitable groove that is positioned to be spaced apart from the thumb of the installer.

Preferably the open mouth of the end cap has a plurality of radial "teeth" that firmly grasp the body shank. When the end cap is slidably telescoped upon the body shank, the teeth grasp the shank for a reliable mechanical connection without radially compressing or deforming the connector body. The end cap may assume any position along the length of body shank between the annular rear end of the body and the annular stop ring face. Cable is restrained within the connector by an internal jam point that resists axial withdrawal of the cable end.

Thus a basic object is to provide an improved, compression type electrical connector suitable for satellite and cable television systems.

Another basic object is to provide an improved compression-type F-connector that can be reliably used with a variety of different installation tools.

It is also an object to provide a compression type F-connector of the character described that facilitates a proper "capture" by various compression installation tools.

Another object is to provide a connector of the character described that is user-friendly and easily installed. The tactile features of my preferred invention make connector handling alignment easier and faster, simplifying the job of the installer.

A related object is to provide a compression type F-connector that provides an installer with useful tactile feedback enabling him or her to speed up the installation process while maintaining quality control and connection reliability.

It is also an important object to provide a compression type F-connector of the type disclosed that reliably provides a good electrical connection path between the threaded nut, the internal post, and the coaxial cable to which the connector is fitted.

A still further object is to provide a connector suitable for use with demanding large, bandwidth systems approximating three GHz.

8

A related object is to provide an F-connector ideally adapted for home satellite systems distributing multiple high definition television channels.

Another important object is to provide a connector of the character described that is weather proof and moisture resistant.

Another important object is to provide a compression F-connector of the character described that can be safely and properly installed without deformation of critical parts during final compression.

A related object is to provide a connector of the character described that reliably functions even when exposed to asymmetric compression forces.

These and other objects and advantages of the present invention, along with features of novelty appurtenant thereto, will appear or become apparent in the course of the following descriptive sections.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

In the following drawings, which form a part of the specification and which are to be construed in conjunction therewith, and in which like reference numerals have been employed throughout wherever possible to indicate like parts in the various views:

FIG. 1 is a longitudinal isometric view of the preferred connector, showing it in an uncompressed preassembly or "open" position;

FIG. 2 is a longitudinal top plan view of the connector of FIG. 1, the bottom view substantially comprising a mirror image;

FIG. 3 is a longitudinal side elevational view of the connector of FIGS. 1 and 2, the opposite side view substantially comprising a mirror image;

FIG. 4 is a front end view, taken from a position generally above FIG. 2 and looking down;

FIG. 5 is a rear end view, taken from a position generally below FIG. 2 and looking up;

FIG. 6 is a longitudinal isometric view of the preferred connector similar to FIG. 1, but showing it in a compressed, or "closed" position it assumes after compression;

FIG. 7 is a longitudinal top plan view of the closed connector of FIG. 6, the bottom view substantially comprising a mirror image;

FIG. 8 is a longitudinal side elevational view of the closed connector of FIGS. 6 and 7, the opposite side view substantially comprising a mirror image;

FIG. 9 is a longitudinal isometric view of an alternative preferred connector, showing it in an uncompressed preassembly or "open" position;

FIG. 10 is a longitudinal isometric view of the alternative connector of FIG. 9, showing it in a compressed or "closed" position;

FIG. 11 is an exploded, sectional view of the preferred connector of FIG. 1;

FIG. 12 is an enlarged, longitudinal sectional view of the preferred post;

FIG. 13 is an enlarged, longitudinal sectional view of the preferred hex head;

FIG. 14 is an enlarged, longitudinal sectional view of the preferred connector body;

FIG. 15 is an enlarged, longitudinal sectional view of the preferred end cap;

FIG. 16 is an enlarged, longitudinal sectional view of the preferred connector of FIG. 1, shown in the compressed position with no coaxial cable;

US 7,513,795 B1

9

FIG. 17 is an enlarged, longitudinal sectional view of the preferred connector, shown in the "open" or uncompressed position with a prepared end of the coaxial cable inserted; and,

FIG. 18 is an enlarged, longitudinal sectional view of the preferred connector shown in the compressed position and attached to a prepared coaxial cable end.

DETAILED DESCRIPTION OF THE INVENTION

With initial reference directed to FIG. 1—of the appended drawings, an open F-connector for coaxial cable constructed generally in accordance with the best mode of the invention has been generally designated by the reference numeral 20. The same connector, when closed as in FIGS. 2 and 3 after compression, has been generally designated by the reference numeral 21. Connectors 20 and/or 21 are adapted to terminate an end of properly prepared coaxial cable, as will be discussed hereinafter in conjunction with the description of FIGS. 16-18. After a prepared end of coaxial cable is properly inserted through the open bottom end 26 of an open connector 20, the connector is placed within a suitable compression hand tool for compression, substantially assuming the closed configuration of FIG. 6.

With additional reference directed to FIGS. 11 and 13, the preferred rigid, tubular, metallic nut 30 has a conventional faceted, preferably hexagonal drive head 32 integral with a protruding, coaxial stem 33. Conventional, internal threads 35 are defined in the nut or head interior for rotatable, threadable mating attachment to a suitably-threaded socket. The open front mouth 28 of the connector (i.e., FIG. 1) appears at the front of stem 33 surrounded by annular front face 34 (FIG. 13). A circular passageway 37 is concentrically defined in the faceted drive head 32 at the rear of nut 30. Passageway 37 is externally, coaxially bounded by the outer, round peripheral wall 38 forming a flat, circular end of the connector nut 30. An inner, annular shoulder 39 on the inside of head 32 is spaced apart from and parallel with outer wall 38 (FIG. 13). A leading chamfer 40 and a spaced part rear chamfer 41 defined on hex head 32 are preferred for ease of handling.

An elongated, tubular body 44 preferably molded from plastic is rotatably coupled to the nut 30. Body 44 preferably comprises a tubular stop ring 46 (i.e., FIG. 14) that is integral with a reduced diameter shank 48 sized to fit as illustrated in FIG. 11. The elongated, outer periphery 52 of shank 48 is smooth and cylindrical. The larger diameter stop ring 46 has an annular, rear wall 54 that is coaxial with shank 48. An end cap 56 is pressed unto body 44, coaxially engaging the shank 48. The end cap 56 discussed hereinafter (i.e., FIGS. 11, 15) will smoothly, frictionally grip body 44 along and upon any point upon body shank 48, with maximum travel or displacement limited by stop ring 46. In other words, when the end cap 56 is compressed unto the body, and the connector 20, 21 assumes a closed position (i.e., FIG. 6), annular wall 54 on the body stop ring 46 will limit maximum deflection or travel of the end cap 56.

The resilient, preferably molded plastic body 44 is hollow. Stop ring 46 has an internal, coaxial passageway 58 extending from the annular front face 59 defined at the body front (i.e., FIG. 14) a major portion of the ring length. Passageway 58 extends to an inner, annular wall 60 that coaxially borders another passageway 62, which has a larger diameter than passageway 58. The elongated passageway 62 is coaxially defined inside shank 48 and extends to rear, annular surface 64 (FIG. 14) coaxially located at the rear end of the shank 48. For moisture sealing, it is preferred that an annular grommet 66 (FIG. 11) be inserted within passageway 62, coming to rest

10

against inner, annular wall 60 (i.e., FIG. 14). Grommet 66 is preferably made of a silicone elastomer. The diameter of body shank passageway 62 (FIGS. 11, 14) is substantially the same as the outer diameter of grommet 66. However, the diameter of inner grommet passageway 68 is preferably less than the diameter of body passageway 58 (FIGS. 11, 14) to dependably frictionally engage the post 70 described below.

Importantly, body 44 has a tactile means that is easily identified and recognized by an installer when he or she grasps a connector with his hand. The ring-shaped stop ring 46 defined on body 44 has at least one tactile region 45 prominently defined upon its external periphery to be appreciated by the sense of touch. As best seen in FIGS. 8 and 11, there are preferably two tactile regions 45, one on top and one on the bottom of the connector 20, 21. Each tactile region 45 preferably (i.e., FIGS. 1, 7, 11 and 14), comprises a plurality of regularly spaced apart, convex projections 49 rising upwardly away from the outer, cylindrical surface of the body's integral stop ring 46. The connectors 23, 24 in FIGS. 9 and 10 comprise an annular stop ring 46 as before, but there is no specific tactile surface defined upon it. Preferably these tactile projections 49 are arranged in orderly rows and/or columns. The tactile projections provide a definite "feel" when touched or grasped by an installer, who may grasp the connector between the thumb and forefinger, pressing against opposite tactile regions. The resultant tactile "feel" makes it easier to repetitively handle and position connectors on the job. The resultant tactile feedback allows the installer to conveniently manipulate and position the connector 20, 21 while forcing a prepared coax end through it, and to thereafter properly align the connector within the gripping mechanism of an installing tool conveniently and quickly. Proper connections can be made without tediously and continuously focusing ones eyes on the connector and coax. As explained later, a resilient ring 57 preferably attached to the end cap 56 enhances the overall tactile feel of the connectors 20, 21.

With primary reference directed now to FIGS. 11 and 12, the post 70 rotatably, mechanically couples the hex headed nut 30 to the plastic body 44. The metallic post 70 also establishes electrical contact between the braid of the coax (i.e., FIGS. 16-18) and the nut 30. The tubular post 70 defines an elongated shank 71 with a coaxial, internal passageway 72 extending between its front 73 and rear 74. A front, annular flange 76 is spaced apart from an integral, reduced diameter flange 78, across a ring groove 80. A conventional, resilient O-ring 82 is preferably seated within groove 80 when the connector is assembled. A barbed collar region 84 having multiple, external barbs 86 is press fitted into the body 44, frictionally seating within passageway 58 (i.e., FIG. 16) and partially penetrating the grommet 66. In assembly it is also noted that post flange 76 (i.e., FIGS. 12, 16) axially contacts inner head wall 39 (FIG. 13). Inner post flange 78 axially abuts front face 59 (FIG. 14) of body 44 with post 70 penetrating passageway 58. The sealing O-ring 82 is circumferentially frictionally constrained within nut 30 coaxially inside passageway 37 (FIGS. 13, 16). Finally, the rear end of post shank 71 has a pair of spaced-apart rings forming barbs 86 that penetrate the coaxial cable, such that the inner insulated coaxial cable conductor penetrates passageway 72 and enters the front mouth 28 formed by the nut 30. Also, the braided shield of the coax is positioned around the exterior of post shank 71, within annulus 88 (FIG. 16) coaxially formed within passageway 62 between post 70 and the shank 48 of body 44 (FIGS. 11, 14).

The preferred end cap 56 is best illustrated in FIGS. 5, 11 and 15. The rigid, preferably metallic end cap 56 comprises a tubular body 92 that is integral and concentric with a rear neck

US 7,513,795 B1

11

94 of reduced diameter. The neck 94 terminates in an outer, annular flange 95 forming the end cap rear and defining a coaxial cable input hole 97 with a beveled peripheral edge 98. In all embodiments 20, 21 (FIGS. 2, 6) and 23, 24 (FIGS. 9, 10), an annular ring groove 96 concentrically defined about neck 94 (FIG. 15). The ring groove 96 is axially located between body 92 and flange 95. The front of the end cap 56, and the front of body 92 (FIG. 15) is defined by concentric, annular face 93. The external ring groove 96 is readily perceptible by touch. However, it is preferred that resilient ring 57 (FIG. 11) be seated within groove 96 in embodiments 20, 21 as seen in FIGS. 3 and 6.

Hole 97 at the rear of end cap 56 (FIG. 15) communicates with cylindrical passageway 100 concentrically located within neck 94. Passageway 100 leads to a larger diameter passageway 102 defined within end cap body 92. Passageway 102 is sized to frictionally, coaxially fit over shank 48 of connector body 44 in assembly. There is an inner, annular wall 105 concentrically defined about neck 94 and facing within large passageway 102 within body 92 that is a boundary between end cap body 92 and end cap neck 94. Once a prepared end of coaxial cable is pushed through passageways 100, and 102 it will expand in diameter as it is axially penetrated by post 70, and subsequent withdrawal from the connector will be resisted by contact with internal wall 105.

The smooth concentric outer surface of the connector body's shank 48 (i.e., FIG. 11) fits snugly within end cap passageway 102 when the end cap 56 is telescopically, slidably fitted to the connector body 44. Cap 56 may be firmly pushed onto the connector body 44 and then axially forced a minimal, selectable distance to semi-permanently retain the end cap 56 in place on the body (i.e., coaxially frictionally attached to shank 48). There is no critical detented position that must be assumed by the end cap. The inner smooth cylindrical surface 104 of the end cap 56 is defined concentrically within body 92 (FIG. 15). Surface 104 coaxially, slidably mates with the smooth, external cylindrical surface 52 (FIG. 14) of the body shank 48. Thus the end cap 56 may be partially, telescopically attached to the body 44, and once coax is inserted as explained below, end cap 56 may be compressed onto the body, over shank 48, until the coax end is firmly grasped and the parts are locked together. It is preferred however that the open mouth 106 at the end cap front have a plurality of concentric, spaced apart beveled rings 108 providing the end cap interior surface 104 with peripheral edges or "teeth" 110 that firmly grasp the body shank 48 (i.e., FIGS. 11, 14). Preferably there are three such "teeth" 110.

When the end cap 56 is compressively mated to the body 44, teeth 110 can firmly grasp the plastic shank 48 and make a firm connection without radially compressing the connector body, which is not deformed in assembly. The end cap may be compressed to virtually any position along the length of body shank 48 between a position just clearing annular face 64 (i.e., FIG. 14) and the annular face 54 at the rear of the body stop ring 46 (FIG. 14). Maximum deflection of the end cap is limited when the front face 93 of the end cap (FIG. 15) forcibly contacts the annular rear wall 54 (FIG. 14) of the connector body 44.

Referring primarily now to FIGS. 16-18, a prepared end of coaxial cable 116 is seen. The coaxial cable 116 has an outermost plastic covering 117, a concentric braided metal sheath 118, and an inner conductor 119. When the prepared end is first forced through the connector rear, passing through end connector hole 97 (FIG. 15) and through passageways 100, 102, the end cap 56 is uncompressed as in FIG. 17. The coaxial cable prepared end is forced through the annulus 88 between the post 70 and the inner cylindrical surface of shank

12

48 (FIG. 14) with post 70 coaxially penetrating the coax between the conductive braid and the insulated inner conductor. The outer metallic braid is folded back, and as seen in FIG. 18, makes electrical contact with the post 70 and portions of the end cap 56. The innermost cable conductor is routed through the post, and protrudes from the mouth 28 (i.e., FIG. 16) of the nut 30, where conductor 119 forms the male portion of the F-connector 20, 21. Axial withdrawal of the coax after compression of the end cap 56 (FIG. 18) is prevented by the reduced diameter inner wall 105 (FIGS. 15, 18), within the end cap, and by the jam point 120 (FIG. 18).

From the foregoing, it will be seen that this invention is one well adapted to obtain all the ends and objects herein set forth, together with other advantages which are inherent to the structure.

It will be understood that certain features and subcombinations are of utility and may be employed without reference to other features and subcombinations. This is contemplated by and is within the scope of the claims.

As many possible embodiments may be made of the invention without departing from the scope thereof, it is to be understood that all matter herein set forth or shown in the accompanying drawings is to be interpreted as illustrative and not in a limiting sense.

What is claimed is:

1. A compressible F-connector adapted to be electrically and mechanically attached to the prepared end of a coaxial cable for thereafter establishing an electrical connection to an appropriate threaded socket, the coaxial cable comprising a center conductor surrounded by insulation that is coaxially surrounded by an outer conductive braid and an outermost insulating jacket, said F-connector comprising:

a nut adapted to be threadably coupled to said socket;
an elongated, hollow post having a flanged end mechanically coupled to said nut and a reduced diameter trailing end adapted to be inserted into said prepared cable end around the center conductor insulation and coaxially beneath said outer conductive braid;

a hollow tubular body coaxially disposed over said post, the body having a front end disposed adjacent said nut and a rear end, said body comprising an external travel limiting stop ring and an integral, elongated tubular shank disposed between said stop ring and said rear end, said shank comprising a smooth, cylindrical outer surface that is free of obstructions extending from said stop ring to said rear end, and the body having an internal passageway with a diameter greater than the diameter of said post such that an annular void is formed between said post and said body;

wherein external tactile regions are provided on said stop ring that are sensed by touch to aid in the manual assembly and positioning of the connector both before and after assembly;

a tubular end cap comprising an open end and a terminal end, the end cap comprising a smooth hollow interior, and the end cap adapted to be slidably coupled to said shank and variably positioned as desired by a user, the end cap comprising an interior passageway through which coaxial cable may pass and means for establishing an internal jam point for confining the prepared cable within the connector;

said tubular end cap comprising an external ring groove defined adjacent said terminal end and wherein a resilient O-ring is seated within said ring groove to complement the tactile regions by stimulating the sense of touch of an installer; and,

IC1

US 7,513,795 B1

13

wherein an annular void exists between said post and said body in which the coaxial cable outer conductive braid is restrained between said post and said body and electrically conductively contacted by said post; and, wherein the end cap is frictionally attached by compressively axially deflecting said end cap towards said nut such that the end cap will lock at any position along the cylindrical outer surface of said shank without assuming a predetermined detented position, and wherein the coaxial cable end is axially restrained after end cap compression within said connector substantially at said jam point, with an uninsulated portion of the cable center conductor extending through said nut thereby forming the male part of the resulting electrical connection.

2. The F-connector as defined in claim 1 wherein the external tactile regions comprise a plurality of convex projections defined upon said stop ring.

3. A compressible F-connector adapted to be electrically and mechanically attached to the prepared end of a coaxial cable for thereafter establishing an electrical connection to an appropriate threaded socket, the coaxial cable comprising a center conductor surrounded by insulation that is coaxially surrounded by an outer conductive braid and an outermost insulating jacket, said F-connector comprising:

a nut adapted to be threadably coupled to said socket;

an elongated, hollow post having a flanged end mechanically coupled to said nut and a barbed end adapted to be inserted into said prepared cable end around the center conductor insulation and coaxially beneath said outer conductive braid;

a hollow tubular body coaxially disposed over said post, the body comprising an elongated tubular shank having a smooth, cylindrical outer surface that is free of obstructions, and the body having an internal passageway with a diameter greater than the diameter of said post such that an annular void is formed between said post and said body;

externally defined tactile means defined on said body sensed by touch for aiding the manual positioning of said connector, said tactile means comprising a plurality of molded convex projections;

a tubular end cap adapted to be slidably coupled to said body shank and positioned as desired by a user, the end cap comprising an interior passageway through which coaxial cable may pass, wherein said end cap comprises an external ring groove and a resilient O-ring is seated within said ring groove to aid said tactile means by stimulating the sense of touch of an installer;

means within said connector for establishing an internal jam point for confining the prepared cable within the connector;

wherein an annular void exists between said post and said body in which the coaxial cable outer conductive braid is restrained between said post and said body and electrically conductively contacted by said post; and

wherein the end cap is frictionally attached to the body and compressively axially telescoped to any position along the cylindrical outer surface of said shank without assuming a predetermined detented position, and wherein an uninsulated portion of the cable center conductor extends through said nut thereby forming the male part of the resulting electrical connection.

14

4. The F-connector as defined in claim 3 wherein: the body comprises a travel limiting stop ring integral with said shank for limiting end cap travel; and, the tactile means comprises a plurality of convex projections defined on said stop ring.

5. The F-connector as defined in claim 4 wherein the tactile means convex projections are arranged in columns and rows.

6. An F-connector adapted to be electrically and mechanically attached to the prepared end of a coaxial cable for thereafter establishing an electrical connection to an appropriate threaded socket, the coaxial cable comprising a center conductor surrounded by insulation that is coaxially surrounded by an outer conductive braid and an outermost insulating jacket, said F-connector comprising:

a nut adapted to be threadably coupled to said socket;

an elongated, hollow inner post having a flanged end mechanically coupled to said nut and a barbed end adapted to be inserted into said prepared cable end around the center conductor insulation and coaxially beneath said outer conductive braid;

a hollow tubular body coaxially disposed over said post, the body comprising an elongated tubular shank having a smooth, cylindrical outer surface that is free of obstructions, and the body having an internal passageway with a diameter greater than the diameter of said inner post such that an annular void is formed between said post and said body;

a tubular end cap adapted to be slidably coupled to said body shank and positioned as desired by a user, the end cap comprising an interior passageway through which coaxial cable may pass, and wherein the cap has a hollow interior comprising teeth means for frictionally gripping the outer surface of said body shank at any desired user position;

said body comprises a travel limiting stop ring integral with said shank for limiting end cap travel;

means within said connector for establishing an internal jam point for confining the prepared cable within the connector;

wherein an annular void exists between said post and said body in which the coaxial cable outer conductive braid is positioned between said post and said body and electrically conductively contacted by said post;

wherein the end cap is frictionally attached to the body and compressively axially telescoped to any position along the cylindrical outer surface of said shank without assuming a predetermined detented position, and wherein an uninsulated portion of the cable center conductor extends through said nut thereby forming the male part of the resulting electrical connection; and, tactile means defined on said body and adapted to be sensed by touch for aiding the manual positioning of said connector, the tactile means comprising a plurality of convex projections arranged in columns and rows defined on opposite sides of said stop ring so that the tactile means may be readily sensed between the thumb and forefinger of an installer.

7. The F-connector as defined in claim 6 wherein the end cap comprises an external ring groove, and a resilient O-ring is seated within said ring groove to aid said tactile means by stimulating the sense of touch of an installer.

* * * * *

Int. Cl.: 9

Prior U.S. Cls.: 21, 23, 26, 36 and 38

Reg. No. 2,290,984

United States Patent and Trademark Office

Registered Nov. 9, 1999

**TRADEMARK
PRINCIPAL REGISTER**

PERFECT VISION

PERFECT 10 ANTENNA COMPANY INC. (AR-
KANSAS CORPORATION)
6130 GETTY DRIVE
NORTH LITTLE ROCK, AR 72117

FOR: MICROWAVE SATELLITE ANTEN-
NAS, ELECTRONIC RECEIVERS FOR MICRO-
WAVE SATELLITE ANTENNA SYSTEMS,
MICROWAVE AMPLIFIERS, MICROWAVE
DOWN CONVERTERS, MICROWAVE CON-
NECTORS AND MICROWAVE CABLES, IN
CLASS 9 (U.S. CLS. 21, 23, 26, 36 AND 38).


FIRST USE 3-1-1998; IN COMMERCE
3-1-1998.

OWNER OF U.S. REG. NOS. 2,056,137 AND
2,101,976.

NO CLAIM IS MADE TO THE EXCLUSIVE
RIGHT TO USE "PERFECT", APART FROM
THE MARK AS SHOWN.

SER. NO. 75-494,279, FILED 6-1-1998.

RONALD AIKENS, EXAMINING ATTORNEY



FACTUAL BACKGROUND

9. Perfect 10 is a renowned distributor of electronic products for the television industry, including but not limited to, satellite dishes, cable, connectors, and other accessories. Perfect 10 markets products designed and patented by DS. Perfect 10 owns the unregistered trademarks PERFECT 10 and PERFECT 10 SATELLITE DISTRIBUTING COMPANY, and the registered trademark PERFECT VISION.

10. For over twenty (20) years Perfect 10 has been in the electronics business and has used the term "Perfect" in its trademarks.

11. Perfect 10 is distributing products in this and other jurisdictions under the brand names "PERFECT 10 SATELLITE DISTRIBUTING COMPANY," "PERFECT 10," and "PERFECT VISION." Perfect 10 products include F-connectors, including a one-piece crimp-on connector for various forms of wire cable, and wire cable.

12. Mezzalingua/PPC is distributing products in this District, including connectors, and has recently begun to sell wire cable in this District.

13. Perfect 10 and Mezzalingua/PPC are competitors in the field of electronic accessories, and in this instance, connectors and cable in this District.

14. Mezzalingua/PPC is the assignee of the '416 Patent entitled "Cable Connector With Elastomeric Band." Mezzalingua/PPC, through its Vice President of Sales, Andy White, threatened litigation against Perfect 10 for alleged infringement of intellectual property related to connectors. In mid 2009, Andy White had a telephone conversation with Bob Chastain, CEO of Perfect 10, in which he stated that Perfect 10 was violating Mezzalingua/PPC's intellectual property rights with regards to connectors.

White then stated Mezzalingua/PPC would sue Perfect 10 for infringement of intellectual property related to connectors including the RIDGELOC connector.

15. Shortly thereafter, Perfect 10 was contacted by one of its largest customers, which is also a customer of Mezzalingua/PPC, asking if Perfect 10 intended to indemnify the customer against claims that might be brought by Mezzalingua/PPC against it. On December 10, 2009, Perfect 10, received a letter from Mezzalingua/PPC stating a suit was filed but Perfect 10 was not served with a Complaint. P-10/DS do not believe a court in New York would be a proper jurisdiction or venue and, if served, P-10/DS will file motions to dismiss. Mezzalingua/PPC has a history of litigation of intellectual property rights, including without limitation, patents on connectors. There are numerous complaints and recorded decisions of cases involving Mezzalingua/PPC, as the Plaintiff, claiming infringement of intellectual property rights, specifically patents.

16. As a result of Mezzalingua/PPC's accusations of infringement, Perfect 10 has and continues to have reasonable apprehension that Mezzalingua/PPC will claim infringement of its cable connector-related patents, including specifically the '416 Patent. Mezzalingua/PPC actions have caused Perfect 10's customers to decline or delay orders. Perfect 10 is being irreparably harmed by Mezzalingua/PPC's threats.

17. Perfect 10 uses the name Perfect Vision on its cable. All of its cable products are clearly identified with this name. Many other electronic products distributed by Perfect 10 are branded with this name. Perfect 10 established the marks PERFECT 10 , PERFECT 10 SATELLITE DISTRIBUTING COMPANY and PERFECT VISION through actual use over the course of many years. As set forth hereinafter, P-10/DS believes

the '416 is invalid. Further attempts by Mezzalingua to restrict competition by use of the '416 may give rise to anti-trust claims by P-10/DS.

18. Recently, and in an attempt to copy the "Perfect" name, Mezzalingua/PPC began distributing cable called "Perfect Flex". This is an infringement of Perfect 10's registered and unregistered trademarks incorporating the term Perfect.

COUNT I.
WILLFUL INFRINGEMENT OF PERFECT 10'S
U.S. TRADEMARK REGISTRATION NO. 2290984

19. Perfect 10 markets its cable under the registered trademark name "PERFECT VISION". Perfect 10 established a strong, widespread customer base utilizing this mark in connection with its cable television products including cable. There is a strong likelihood that customers of Perfect 10 are and will continue to be confused by competing products, such as Mezzalingua/PPC's cable products, using marks that incorporate the term "Perfect".

20. Mezzalingua/PPC markets cable products under the name "Perfect Flex". Perfect 10 notified Mezzalingua/PPC on May 13, 2009, that Mezzalingua/PPC was infringing Perfect 10's PERFECT VISION trademark.

21. Mezzalingua/PPC's use of the term "Perfect Flex" infringes Perfect 10's registered PERFECT VISION mark, and is in violation of the *Lanham Act of 1946*, as amended, 15 U.S.C. §1051 *et. seq.* including but not limited to 15 U.S.C. § 1114.

22. Perfect 10 will be irreparably harmed by Defendant's use of the term "Perfect Flex" on Defendant's cable products.

23. Defendant Mezzalingua/PPC was aware of Perfect 10's marketing success. With knowledge of Perfect 10 and its registered trademark, Mezzalingua/PPC attempted

to illegally appropriate Perfect 10's customers by using a confusingly, similar name on its cable product.

24. Perfect 10 is entitled to a temporary restraining order, preliminary injunction, and permanent injunction prohibiting Mezzalingua/PPC from using the confusingly similar name "Perfect Flex" on Mezzalingua/PPC's cable products.

25. Perfect 10 is entitled to compensatory damages from Defendant Mezzalingua/PPC for infringement of its PERFECT VISION mark.

26. Perfect 10 is entitled to statutory and punitive damages from Defendant Mezzalingua/PPC for willful infringement of its PERFECT VISION mark.

COUNT II.
WILLFUL INFRINGEMENT OF PERFECT 10'S
UNREGISTERED U.S. TRADEMARKS

27. Perfect 10 markets its cable under the unregistered trademarks PERFECT 10 and PERFECT 10 SATELLITE DISTRIBUTING COMPANY. Perfect 10 established a strong, widespread customer base utilizing these marks in connection with its cable television products including cable. There is a strong likelihood that customers of Perfect 10 are and will continue to be confused by competing products, such as Mezzalingua/PPC's cable products that use marks incorporating the term "Perfect".

28. Mezzalingua/PPC markets a cable product under the name "Perfect Flex". Perfect 10 notified Mezzalingua/PPC on May 13, 2009, that Mezzalingua/PPC was infringing Perfect 10's PERFECT VISION trademark.

29. Mezzalingua/PPC's use of the term "Perfect Flex" infringes Perfect 10's unregistered PERFECT 10 and PERFECT 10 SATELLITE DISTRIBUTING COMPANY

marks and is in violation of the *Lanham Act of 1946*, as amended, 15 U.S.C. §1051 *et. seq.*, including but not limited to 15 U.S.C. §1125(a) *et. seq.*

30. Perfect 10 will be irreparably harmed by Defendant's use of the term "Perfect Flex" on Defendant's cable products.

31. Defendant Mezzalingua/PPC was aware of Perfect 10's marketing success. With knowledge of Perfect 10 and its unregistered trademarks, Mezzalingua/PPC attempted to illegally appropriate Perfect 10's customers by using a confusingly, similar name on its cable products.

32. Perfect 10 is entitled to a temporary restraining order, preliminary injunction, and permanent injunction prohibiting Mezzalingua/PPC from using the confusingly similar name "Perfect Flex" on Mezzalingua/PPC's cable products.

33. Perfect 10 is entitled to compensatory damages against Defendant Mezzalingua/PPC for infringement of its PERFECT 10 and PERFECT 10 SATELLITE DISTRIBUTING COMPANY marks.

34. Perfect 10 is entitled to statutory and punitive damages from Defendant Mezzalingua/PPC for willful infringement of its PERFECT 10 and PERFECT 10 SATELLITE DISTRIBUTING COMPANY marks.

COUNT III.
WILLFUL VIOLATION OF PERFECT 10'S
UNREGISTERED STATE TRADEMARKS

35. Perfect 10 markets its cable under the unregistered trademarks PERFECT 10 and PERFECT 10 SATELLITE DISTRIBUTING COMPANY. Perfect 10 established a strong, widespread customer base utilizing these marks in connection with its cable television products including cable. There is a strong likelihood that customers of